



SRWA[®]

P R O D U C T S

2023

PRODUCT CATALOG



POLYMERIC/JOINTING SANDS • ADHESIVE • SEALERS • CLEANERS • FABRIC
GEOGRID • WALL SYSTEMS & ENGINEERING • BASE REPLACEMENT
EROSION & IRRIGATION • DIAMOND BLADES • ACCESSORIES



NEW

SIMPLYTOUGH™

Can be used for a wide variety of applications including porcelain. It's formulated to have High Strength, Easy Activation, & No Haze.

Page 9





INTRODUCTION	02-07
POLYMERIC/JOINTING SAND	08-09
ADHESIVE	10-13
SEALERS	14-21
CLEANERS	22-25
FABRIC	26-33
GEOGRID	34-37
WALL SYSTEMS & ENGINEERING	38-41
BASE REPLACEMENT	42-43
EROSION & IRRIGATION	44-49
DIAMOND BLADES	50-53
ACCESSORIES	54-61
RESOURCES & REFERENCE	62-67

ABOUT SRW PRODUCTS

Welcome!

Over the past 30 plus years we've become leaders in the hardscape industry because we know it's people & partnerships that truly matter. We're family owned & operated by three generations & with that we have learned how hardscapes bring people together.

Our dealer-based company continues to thrive because of our team's commitment to helping your business succeed. Keeping to this goal, we have invested & continue to invest in fortifying our infrastructure, expanding our staff, manufacturing, production, & distribution centers to quickly respond to the needs of our customers from coast to coast.

Our success is partnered with yours. Our high-quality hardscape accessory products ensure the triumph of our partnership.

We provide so much more than products, because we believe in people & partnerships. Our Territory Sales Representatives & Customer Service Team have formed long-lasting relationships by getting to know their customer's individual needs and providing customized solutions.

Our Product Management Team cannot be matched with their expertise in product knowledge & developing innovative products. We have created excellent educational materials. In addition, they are available to provide you with expert consultation.


Our company continues to grow, & we remain both innovative & comprehensive in our product base. We appreciate your business & are especially grateful for future opportunities to partner with you.

At SRW Products we promise to continue to focus on our key priorities of PEOPLE, PRODUCTS & PARTNERSHIPS.



DEALER NETWORK

Our products are available from leading hardscape suppliers across the United States & Canada. Over 4,300 dealers turn to SRW Products for the consistent quality & performance they have come to trust.

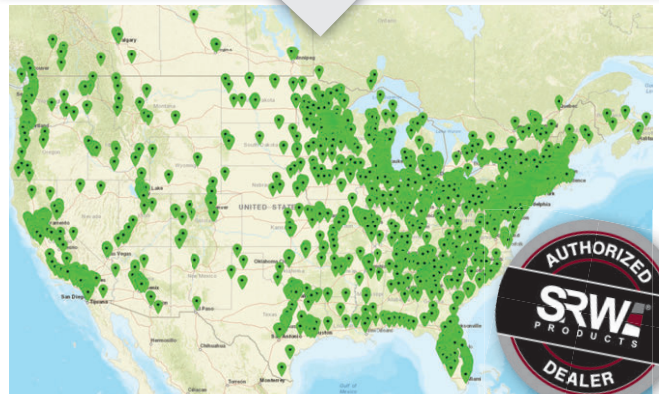

SRW Products Distribution - U.S. & Canada



**After all, we are SRW Products.
No one does it better!**

David Orton

David Orton, CEO



Jason Orton
V.P. of Sales & Marketing
Southeast/New England Region
Cell: 763-350-3327 **Office:** 763-260-8715
Email: jasonorton@srwproducts.com



Tim Sanborn
Regional Sales Manager
West Region
Cell: 763-203-2966 **Office:** 763-260-8713
Email: timsanborn@srwproducts.com



Dale Perbix
Regional Sales Manager
Central Region
Cell: 763-498-2775 **Office:** 763-260-8714
Email: daleperbix@srwproducts.com



Michael Anderson
Regional Sales Manager
Northeast Region
Cell: 856-952-2007 **Office:** 856-244-7004
Email: michaelanderson@srwproducts.com

Visit SRWProducts.com to meet our full sales team.

LOCATIONS

CORPORATE OFFICE

32005 126th Street
PO Box 70
Princeton, MN 55371

Toll Free: 800-752-9326

Phone: 763-389-2722

Fax: 763-389-2725



WEST

DISTRIBUTION CENTER

4801 Feather River Blvd.
Unit 4
Orville, CA 95965

Phone: 530-212-8272

NORTH/CENTRAL

DISTRIBUTION CENTER

32020 126th Street
Princeton, MN 55371

Phone: 800-752-9326

SOUTHEAST

DISTRIBUTION CENTER

2441 Hwy 123 East
Toccoa, GA 30577


Phone: 762-204-1770

NORTHEAST

DISTRIBUTION CENTER

Rt. 55 Industrial Center
70 Sewell Street, Unit I
Glassboro, NJ 08028

Phone: 856-244-7001

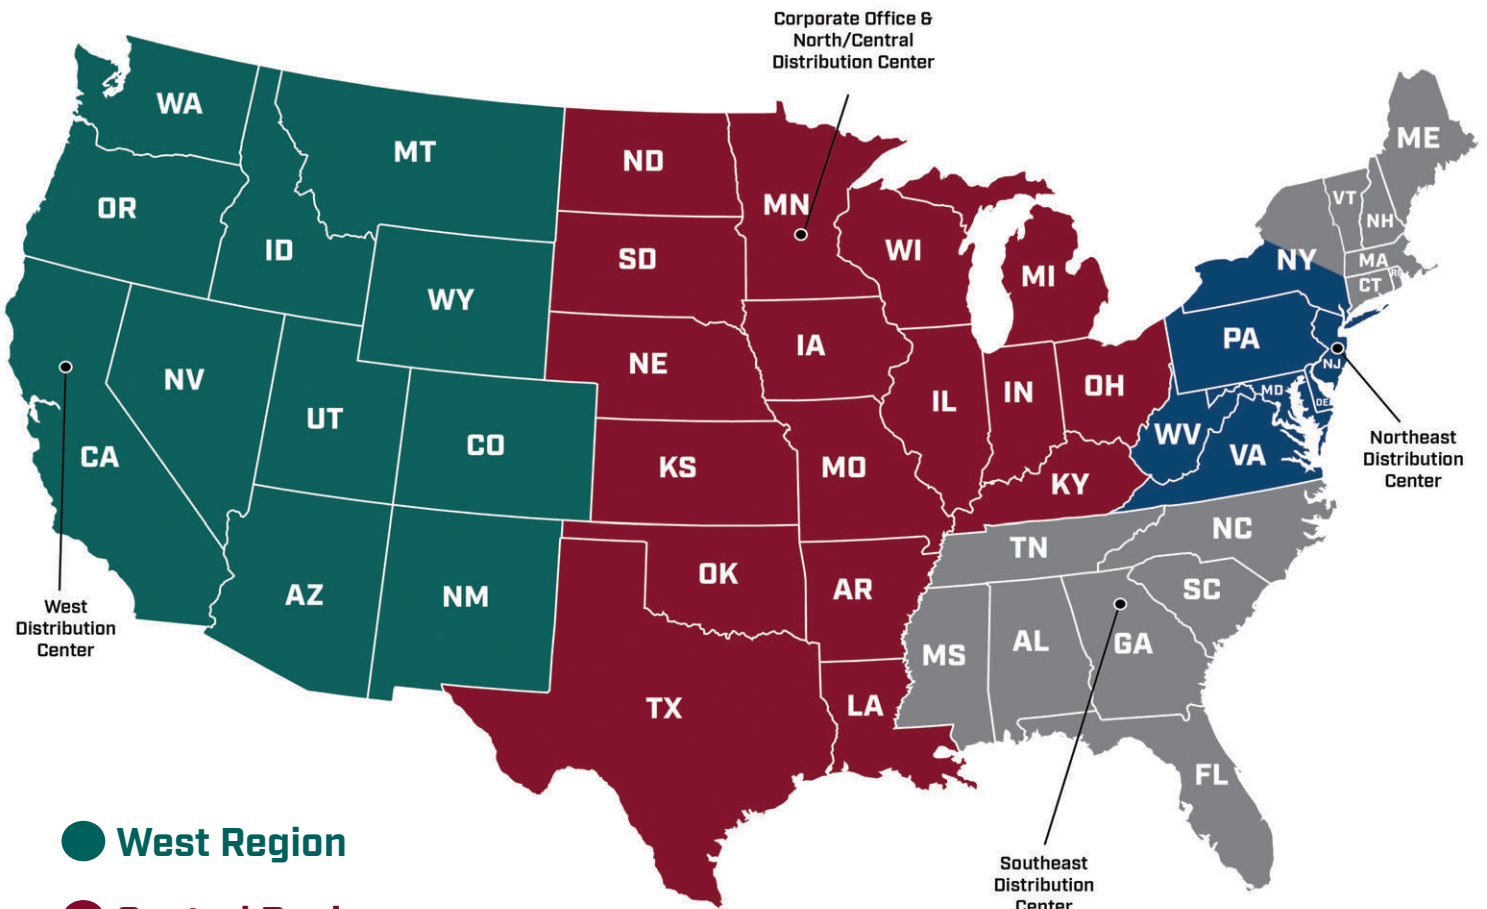

● **West Region**

● **Central Region**

● **Southeast/New England Region**

● **Northeast Region**

Also serving Canada!

2023 NEW PRODUCTS

SRW PRODUCTS: SOLID SOLUTIONS FOR BETTER HARDSCAPES

INSTALLATION PREPARATION

A. Install pavers using manufacturer's guidelines for bedding, leveling & installation. Fully clean off debris from the project area.

- Installations should have a proper drainage layer of sand with a depth of 1" (2.54 cm).
- Concrete overlays require a 1" sand layer in addition to proper drainage including slope, weep holes or through perimeter of project.

B. Compact pavers thoroughly using a rubber-plate compactor.

- If compactor is not rubber-plate, cover pavers with a woven fabric while compacting to help protect paver surface from damage.
- Pavers must be completely dry before installing polymeric sand. Wait 24 hours after rain.

APPLICATION

C. Gently tumble bag, then cut the bottom & apply Simply Tough evenly over the surface.

D. Spread sand into joints, completely filling to the full depth of the pavers.

- Avoid pushing sand over long distances.
- Remove excess sand from surface of pavers before compacting.

E. Compact filled joints using a rubber-plate compactor.

- For natural or cast stone use a vibratory rubber roller or rubber mallet to settle sand on edges of material.
- If joints settle more than 1/8" reapply Simply Tough by following steps C - E again.

F. Remove excess sand from paver surface using a soft bristle broom & set the joint height while removing residue with a leaf blower on low.

- Once complete, joint height should be filled to 1/8" (.32 cm) below the top of the paver.

ACTIVATION

G. Working in areas of 350 - 500 sq. ft. (46.45 sq. m.), lightly mist the paver surface, once surface is wet do not let surface dry out until activation is complete.

- Wait 3 minutes & repeat this process 3-4 times leaving 3 minutes in-between while gradually increasing water flow & making sure to avoid pooling of surface or joints.
- The final watering should supply enough water to rinse off any residual material from the pavers. Use a blower if any remains.

H. Use a screwdriver to test for proper moisture depth of at least 1 1/2" (1.27 cm). If depth is not achieved, immediately wet the area with a shower setting.

I. Once moisture depth is achieved, blow off excess water using a leaf blower.

CURING

J. Curing process varies & may take up to 24 hours to set.

- Lower temps & increased humidity level will increase set times.
- Wait 28 days prior to cleaning.


Net Weight 50 lbs. (22.68 KG)

SRW PRODUCTS

SIMPLY TOUGH™

POLYMERIC SAND

ONE SAND FOR ALL YOUR NEEDS



FOR PAVERS JOINTS UP TO 3/4"

NOHAZE | HIGHSTRENGTH | EASYACTIVATION

CONCRETE PAVERS • NATURAL STONE • PORCELAIN TILE
DRIVEWAYS • WALKWAYS • PATIOS • POOL DECKS • CONCRETE OVERLAYS
FOR RESIDENTIAL OR COMMERCIAL USE

USER TIPS

JOINT SIZE/TYPE

- Joint Width: Recommended for joints between 1/8" to 3/4" (.32 cm to 1.90 cm), 1" at intersecting joints.
- For concrete overlays, a maximum of 1" (2.54 cm) wide joints at intersecting points is recommended.
- Joint Depth: Minimum depth of 1 1/2" (3.81 cm).

COVERAGE

- Narrow Joints: Typical coverage is 55 - 75 sq. ft. (6.11 - 6.97 sq. m.) per bag.
- Wide Joints: Typical coverage is 20 - 30 sq. ft. (1.86 - 2.79 sq. m.) per bag.

INSTALLATION

- Test in a small discrete area.
- Paver must be completely dry with no rain forecasted for at least 24 hours. After activation, area entirely if there's a possibility of rain & promptly uncover once the threat has passed.
- Do not use this product in damp or wet surfaces, doing so will affect the products performance adhering to the surface making it difficult to remove.
- Temperatures must remain above 32°F (0°C) throughout installation & curing.
- Not for use on clay pavers.

Proper compaction is very important for obtaining optimal joint strength. Excessive compaction can prevent polymeric sand from curing properly. For more information on these systems and how to use them, visit www.srwproducts.com.

pg 57

pg 57

SimplyTough™ can be used for a wide variety of applications including porcelain. It's formulated to have High Strength, Easy Activation, & No Haze. This sand is SimplyTough™!

pg 9

pg 13



SF-8™ Spray Foam Adhesive is a strong and durable 8-minute tack-free polyurethane adhesive. It is easy to use; works fast, & provides optimal coverage with a wide range of construction & hardscape materials. Essential Companion Products; SF-8™ Dispenser Gun & SF-8™ Cleaner

TRADITIONAL OR HYBRID GRADED BASE *Recommend Products*

CRETE-RAIL™

Fiber reinforced concrete edging that provides rigid yet flexible support for hardscape projects.

Page 61



WETLOK™

Self-curing jointing material for all types of paving projects with joints of 3/16" to 5".


Page 9



PERMEABLE 350

An excellent choice for permeable paver systems where high strength & water flow are needed simultaneously.


Page 30

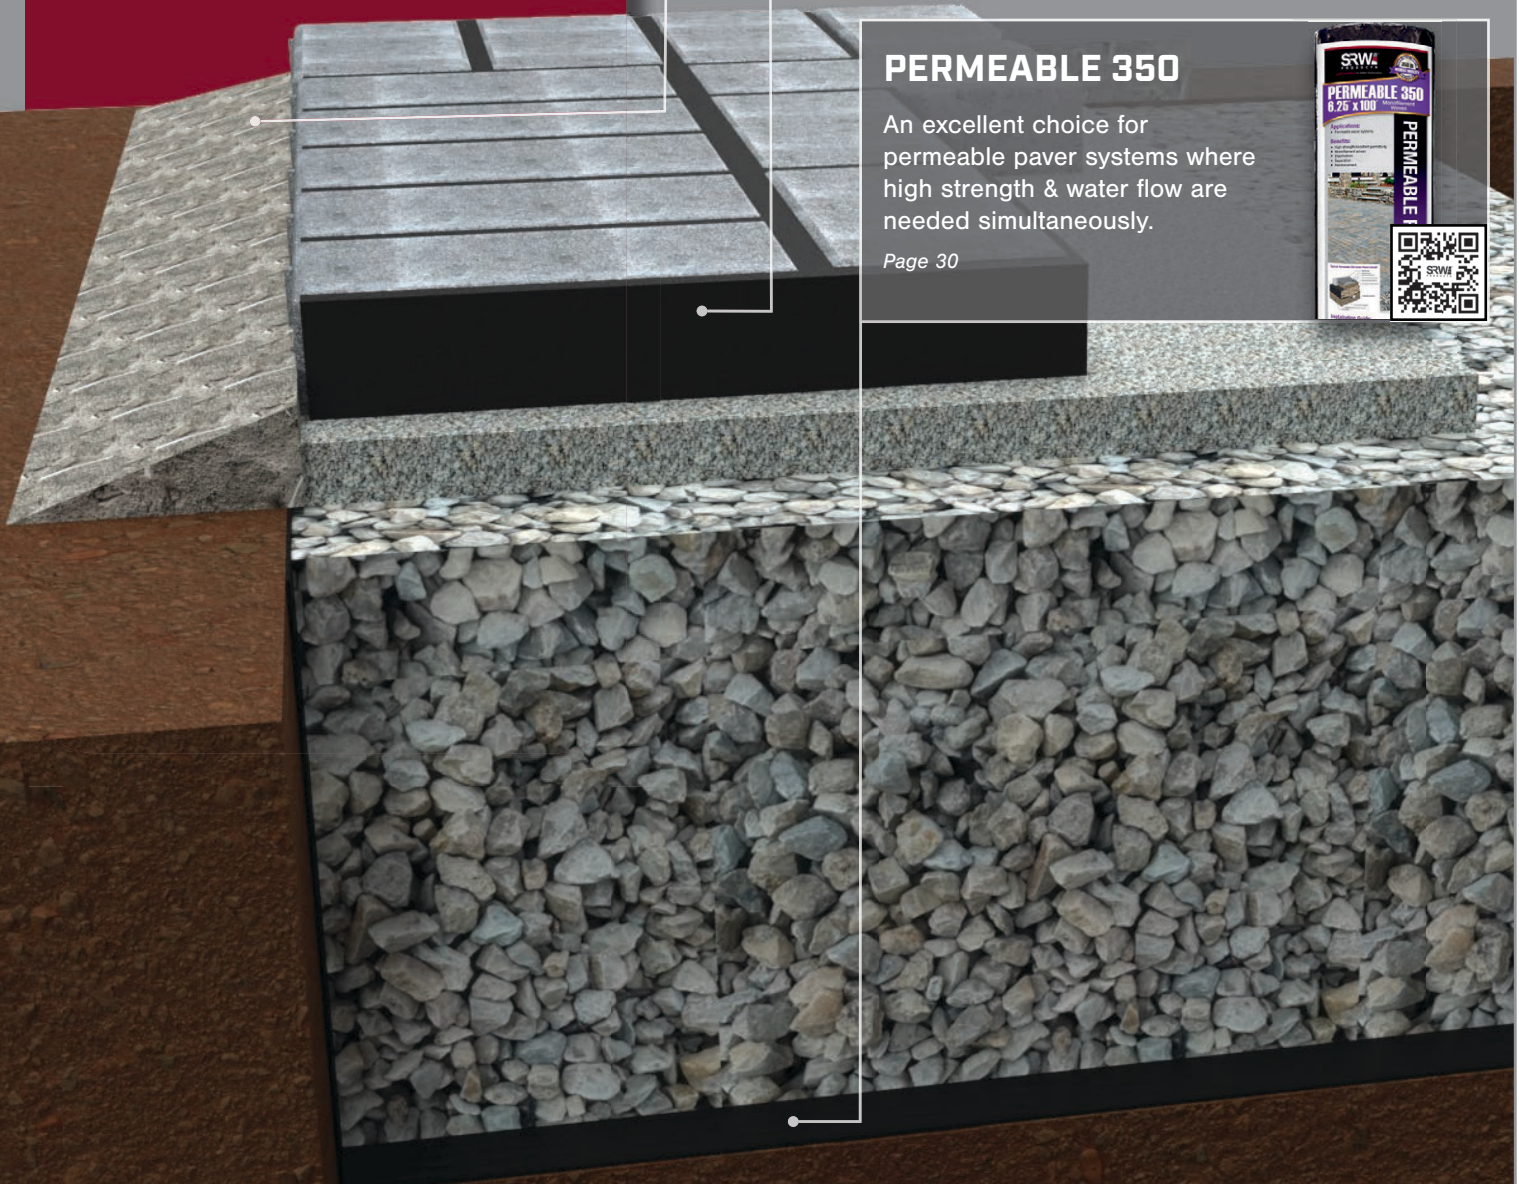

POLYMERIC /JOINTING SANDS

Create strong, lasting hardscapes with polymeric & jointing sand. Our sands were developed based on feedback from industry professionals & perform to the highest expectations. With SRW polymeric & jointing sand, you can expect a clean installation with fast set-up, strong joints, longevity & durability.

PAVERMATE Z3™

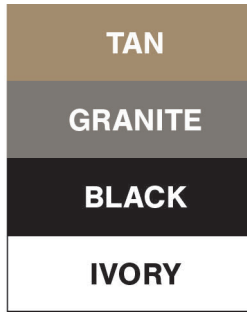

Features

- ▶ **Zero Haze:** Clear polymer technology, along with the removal of Portland, Fly Ash & Crushed Limestone (which are ingredients that cause hazing) set you up for a haze-free project.
- ▶ **Zero Dust:** Specially mixed to bind polymers & sand, reducing fines & creating a dust-free product.
- ▶ **Zero Problems:** Rain safe in just 10 minutes. Fastest set up time in the market helps with unforeseen weather.


Application

- ▶ Concrete Pavers
- ▶ Pool Decks
- ▶ Concrete Overlays & Non-Overlays
- ▶ Driveways
- ▶ Patios & Walkways

PAVERMATE Z3™ • Polymeric Sand • Joints up to 2"

PART #	COLOR	SIZE	QUANTITY	PART #	COLOR	SIZE	QUANTITY
SSAN PAVZ3 TAN	TAN	50 LB BAG	49 BAGS/PLT	SSAN PAVZ3 BLK	BLACK	50 LB BAG	49 BAGS/PLT
SSAN PAVZ3 GRA	GRANITE	50 LB BAG	49 BAGS/PLT	SSAN PAVZ3 IVY	IVORY	50 LB BAG	49 BAGS/PLT

SIMPLY TOUGH™

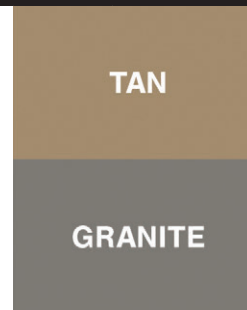

Features

- ▶ No haze
- ▶ High Strength
- ▶ Easy Activation
- ▶ One sand for all your needs


Application

- ▶ Porcelain Tile
- ▶ Concrete Pavers
- ▶ Natural Stone
- ▶ Patios & Walkways
- ▶ Pool Decks
- ▶ Concrete Overlays
- ▶ Driveways

Simply Tough™ • Polymeric Sand • Joints up to 3/4"

PART #	COLOR	SIZE	QUANTITY	PART #	COLOR	SIZE	QUANTITY
SSAN ST TAN	TAN	50 LB BAG	49 BAGS/PLT	SSAN ST GRA	GRANITE	50 LB BAG	49 BAGS/PLT

X-TREME™



Features

- ▶ No haze due to advanced polymer technology
- ▶ Strong, solid joints
- ▶ Long-lasting to prevent washout & weeds
- ▶ Rain safe in 20 minutes


Application

- ▶ Wetcast
- ▶ Natural Stone
- ▶ Patios & Walkways
- ▶ Pool Decks

X-treme™ • Polymeric Sand • Joints up to 6"

PART #	COLOR	SIZE	QUANTITY	PART #	COLOR	SIZE	QUANTITY
SSAN XTRTAN	TAN	50 LB BAG	49 BAGS/PLT	SSAN XTRGRA	GRANITE	50 LB BAG	49 BAGS/PLT

WETLOK™



Features

- ▶ Can be installed in the rain
- ▶ Pre-mixed & ready to use
- ▶ Use for joints 3/16" - 5" (0.48 - 12.7cm)
- ▶ Use with hybrid or traditional base
- ▶ Can keep unused product for future use
- ▶ Permeable
- ▶ 12-month shelf life
- ▶ Easy to use, simply brush into joints & compact with water
- ▶ Resists weeds & plant growth

Application

- ▶ Pool Decks
- ▶ Natural Stone
- ▶ Wetcast
- ▶ Terracotta
- ▶ Concrete/Clay Pavers
- ▶ Patios & Walkways
- ▶ Installations with HexaBase™ & other base replacements

WetLok™ • Permeable Jointing Sand • Joints up to 5"

PART #	COLOR	SIZE	QUANTITY	PART #	COLOR	SIZE	QUANTITY
WETLOK TAN 36	TAN	36 LB TUB	65 TUBS/PLT	WETLOK BLK 36	BLACK	36 LB TUB	65 TUBS/PLT
WETLOK GRA 36	GRANITE	36 LB TUB	65 TUBS/PLT				



ADHESIVE

Lasting, beautiful hardscapes depend on the highest quality adhesives that are easy to use & stand the test of time. That's why we've created a line of adhesives that bond quickly & hold strong. Our diverse line of adhesives can be used for a variety of projects & many applications including retaining walls, natural stone, pavers, bullnose, veneers, & vertical applications.



SF-8™ ADHESIVE

This adhesive is easy to use with a wide range of construction & hardscape materials, works fast, & provides optimal coverage.

Page 13





SURFACE APPLICATION

RETAINING WALLS	PAVERS/CONCRETE	POOL COPINGS	NATURAL STONE & VENEERS	MANUFACTURED STONE	BRICK	OUTDOOR KITCHEN	MASONRY	METALS	WOOD	FOAMBOARD	MOST PLASTICS	GLASS & MIRROR	CERAMIC TILE	FIRE PITS
-----------------	-----------------	--------------	-------------------------	--------------------	-------	-----------------	---------	--------	------	-----------	---------------	----------------	--------------	-----------

ADHESIVE	VERTICAL INSTANT LOCK*	■	■	■	■	■	■	■	■	■	■	■	■	■
SUPERIOR STRENGTH SOLVENT	■	■	■	■	■	■	■	■	■	■	■	■	■	■
RAPID-SET POLYURETHANE	■	■	■	■	■	■	■	■	■	■	■	■	■	■
SF-8 ADHESIVE	■	■	■	■	■	■	■	■	■	■	■	■	■	■

*Always make sure at least one surface is porous. Always test in a small area. Check product label for interior/exterior use.

VERTICAL INSTANT LOCK



Features

- ▶ Holds strong in under 5 seconds
- ▶ High temperature compatible
- ▶ VOC compliant
- ▶ Requires a caulking gun with a **minimum 14:1 thrust ratio**.
- ▶ Instantly locks building materials in place
- ▶ Low odor
- ▶ Interior/exterior applications
- ▶ Repositionable for 10 minutes
- ▶ Quick curing & non-corrosive
- ▶ V-notch nozzle—perfect application every time
- ▶ **Coverage:** 210 linear inches
- ▶ 12 month shelf life

Application

- ▶ Natural Stone
- ▶ Manufactured Stone
- ▶ Brick, Block & Pavers
- ▶ Metals/Wood
- ▶ Glass & Ceramic Tile
- ▶ Veneers
- ▶ Dry Stack
- ▶ Masonry
- ▶ Outdoor Kitchens

SRW Vertical Instant Lock Adhesive

PART #	SIZE	AMT PER CTN	QUANTITY
AVIL 10**	9.5 OZ	12/CTN	64 CTNS/PLT

SUPERIOR STRENGTH SOLVENT-BASED



Features

- ▶ VOC compliant option
- ▶ Superior strength & longevity
- ▶ Works on wet or frozen surfaces
- ▶ High temperature compatible
- ▶ Extrudes down to 10°F
- ▶ Interior/exterior applications
- ▶ **Coverage:**
1/4" Bead: 10 oz 32 ft, 28 oz 89 ft
3/8" Bead: 10 oz 14 ft, 28 oz 35 ft
- ▶ 18 month shelf life

Application

- ▶ Retaining Walls
- ▶ Pavers/Block
- ▶ Natural Stone
- ▶ Metals/Wood
- ▶ Firepits
- ▶ Works on most common landscaping & construction materials

SRW Superior Strength Solvent-Based Adhesive

PART #	SIZE	AMT PER CTN	QUANTITY	PART #	SIZE	AMT PER CTN	QUANTITY
A 10	10 OZ	12/CTN	64 CTNS/PLT	A 28	28 OZ	12/CTN	44 CTNS/PLT

SRW Superior Strength Solvent-Based Adhesive VOC

PART #	SIZE	AMT PER CTN	QUANTITY	PART #	SIZE	AMT PER CTN	QUANTITY
AP 10	10 OZ	12/CTN	64 CTNS/PLT	AP 28	28 OZ	12/CTN	44 CTNS/PLT



DON'T FORGET CAULKING GUNS!

We offer three types of caulking guns, available in 10 oz (295 ml) & 28 oz (828 ml) sizes. Pg 60



RAPID-SET POLYURETHANE



Features

- ▶ VOC compliant
- ▶ Fastest set-up time on the market
- ▶ Designed for construction & landscape projects
- ▶ Suitable for dry or damp surfaces
- ▶ High temperature compatible
- ▶ Interior/exterior applications
- ▶ Premium, long-lasting strength
- ▶ **Coverage:**
1/4" Bead: 10 oz. 32 ft, 28 oz. 89 ft
3/8" Bead: 10 oz. 14 ft, 28 oz. 35 ft
- ▶ 12 month shelf life

Application

- ▶ Retaining Walls
- ▶ Pavers/Concrete
- ▶ Pool Copings
- ▶ Foam/Vinyl/PVC
- ▶ Firepits
- ▶ Brick
- ▶ Metals/Wood
- ▶ Natural Stone
- ▶ Non-porous Substrates
- ▶ Works on most common landscaping & construction materials

SRW Rapid-Set Polyurethane Adhesive

PART #	SIZE	AMT PER CTN	QUANTITY	PART #	SIZE	AMT PER CTN	QUANTITY
APU 10	10 OZ	12/CTN	64 CTNS/PLT	APU 28	28 OZ	12/CTN	44 CTNS/PLT

SF-8™ ADHESIVE

NEW!



Features

- ▶ Fastest set-up time on the market
- ▶ Designed for construction & landscape projects
- ▶ Suitable for dry or damp surfaces
- ▶ High temperature compatible
- ▶ Interior/exterior applications
- ▶ Premium, long-lasting strength
- ▶ **Coverage: 3/8" bead for 600 linear ft**
- ▶ 12 month shelf life

Application

- ▶ Retaining Walls
- ▶ Pavers
- ▶ Concrete
- ▶ Natural Stone
- ▶ Brick
- ▶ Porcelain
- ▶ Steel/Metal
- ▶ Aluminum
- ▶ Vinyl/PVC
- ▶ Wood/Plywood
- ▶ Composite Materials
- ▶ Drywall

SF-8™ Adhesive

PART #	SIZE	AMT PER CTN	QUANTITY
ASF8	24 OZ	12/CTN	84 CTNS/PLT

SF-8™ Dispenser Gun

PART #	QUANTITY
SF8G	1/BOX

SF-8™ Cleaner



PART #	SIZE	AMT PER CTN	QUANTITY
CSF8	16 OZ	12/CTN	84 CTNS/PLT

APPLICATION PATTERNS FOR OPTIMAL MOISTURE DRAINAGE*

For Superior Strength Solvent-Based & Rapid-Set Polyurethane Adhesive



For Vertical Instant Lock Adhesive

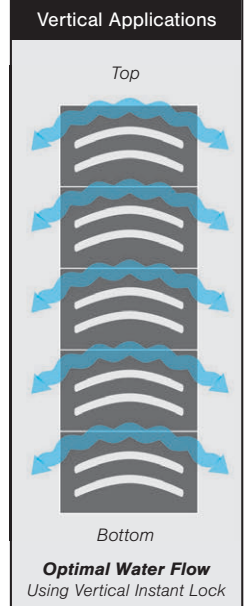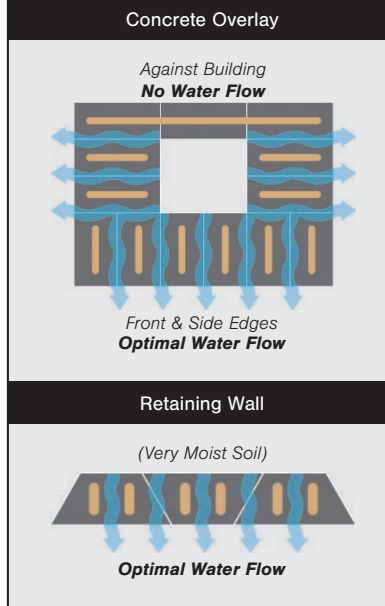

ESSENTIAL COMPANION PRODUCTS

pg 57

*For illustrative purposes only

SEALERS

No matter what type of hardscape you're installing, protect it with a high-quality, long-lasting sealer. SRW sealers are designed specifically for a variety of surfaces. We are proud to offer natural-look/matte, low-gloss, & high-gloss finishing options.



HGX SEALER

This high-quality product protects the surface by creating a barrier against elements that stain & deteriorate the appearance.

Page 18





SURFACE APPLICATION

CONCRETE PAVERS	CLAY PAVERS	CONCRETE PERMEABLE PAVERS	WETCAST	GRANITE/QUARTZ	MARBLE/TRAVERTINE	LIMESTONE	BLUESTONE/SANDSTONE	BLOCK RETAINING WALLS	MANUFACTURED STONE	STAMPED CONCRETE	SEALER CATEGORY
-----------------	-------------	---------------------------	---------	----------------	-------------------	-----------	---------------------	-----------------------	--------------------	------------------	-----------------

SEALERS	SURFACE APPLICATION											SEALER CATEGORY		
	PS PENETRATING	■	■	■										PAVER SEAL
	LG LOW GLOSS	■												
	HG HIGH GLOSS	■												
	PSX PENETRATING X-TREME	■	■	■	■					■	■			PREMIUM SEAL
	LGX LOW GLOSS X-TREME	■			■	■	■	■			■		■	
	HGX HIGH GLOSS X-TREME	■			■	■	■	■			■		■	
	DG DUAL GUARD	■			■	■	■	■		■	■		■	
	PRX PAVER RESTORE X-TREME	■				■	■	■						PAVER SEAL
	SGX STAIN GUARD X-TREME	■	■		■					■				SPECIALTY SEAL
	JS JOINT STABILIZER	■	■		■									
	CG COUNTER GUARD				■	■	■	■	■	■	■			
	S-PS PENETRATING	■				■	■	■	■		■			
	S-PSX PENETRATING XTREME	■				■	■	■	■		■			

Always test a small area. Check product label for interior/exterior use. Refer to surface material manufacturer's recommendations on whether or not to seal.



SPECS/ACCESSORIES

COVERAGE UP TO ___ SF	WATER BASED	SOLVENT BASED	PIGMENTED	SLIT FOAM ROLLER	SLIT FOAM ROLLER X-TREME	SLIP RESIST COMPATIBLE	HEAVY-DUTY CONSTRUCTION SPRAYER	SEALER CATEGORY
-----------------------	-------------	---------------	-----------	------------------	--------------------------	------------------------	---------------------------------	-----------------

SEALERS	SPECS/ACCESSORIES								SEALER CATEGORY		
	PS PENETRATING	200 SQ.FT/GAL	■			■	■			■	PAVER SEAL
	LG LOW GLOSS	150 SQ.FT/GAL	■			■	■	■		■	
	HG HIGH GLOSS	150 SQ.FT/GAL	■			■	■	■		■	
	PSX PENETRATING X-TREME	200 SQ.FT/GAL	■			■	■			■	PREMIUM SEAL
	LGX LOW GLOSS X-TREME	250 SQ.FT/GAL		■			■	■		■	
	HGX HIGH GLOSS X-TREME	250 SQ.FT/GAL		■			■	■		■	
	DG DUAL GUARD	250 SQ.FT/GAL		■			■	■		■	
	PRX PAVER RESTORE X-TREME	250 SQ.FT/GAL		■	■		■	■		■	PAVER SEAL
	SGX STAIN GUARD X-TREME	200 SQ.FT/GAL	■			■	■			■	SPECIALTY SEAL
	JS JOINT STABILIZER	120 SQ.FT/GAL	■			■	■			■	
	CG COUNTER GUARD	75 SQ.FT/QT		■			■			■	
	S-PS PENETRATING	200 SQ.FT/GAL		■			■			■	
	S-PSX PENETRATING X-TREME	200 SQ.FT/GAL		■			■			■	

Coverage may vary depending on surface and application. Refer to product label for full usage instructions.

PAVER SEAL™

PS PENETRATING



Features

- ▶ Water-based
- ▶ Covers up to 200 sq. ft. per gallon
- ▶ CARB Compliant
- ▶ Invisible/Natural-Look finish
- ▶ Minimizes salt & freeze/thaw damage
- ▶ Interior/Exterior applications
- ▶ Makes paver maintenance easier
- ▶ See chart on page 16

Application

- ▶ Concrete Pavers
- ▶ Clay Pavers
- ▶ Concrete Permeable Pavers

Paver Seal™ PS Penetrating

PART #	SIZE	AMT PER CTN	QUANTITY	PART #	SIZE	AMT PER CTN	QUANTITY
SSPSPLUS CTN	1 GAL	4/CTN	36 CTNS/PLT	SSPSPLUS 5 GAL	5 GAL	1	36/PLT

LG LOW GLOSS



Features

- ▶ Water-based
- ▶ Covers up to 150 sq. ft. per gallon
- ▶ Low-gloss finish, color enhancing
- ▶ Stabilizes joint sand from washout, weeds & ants
- ▶ Minimizes salt & freeze/thaw damage
- ▶ Provides UV protection
- ▶ Interior/Exterior applications
- ▶ See chart on page 16

Application

- ▶ Concrete Pavers

Paver Seal™ LG Low Gloss

PART #	SIZE	AMT PER CTN	QUANTITY	PART #	SIZE	AMT PER CTN	QUANTITY
SSPS CTN	1 GAL	4/CTN	36 CTNS/PLT	SSPS 5GAL	5 GAL	1	36/PLT

HG HIGH GLOSS



Features

- ▶ Water-based
- ▶ Covers up to 150 sq. ft. per gallon
- ▶ High-gloss, wet-look finish
- ▶ Minimizes salt & freeze/thaw damage
- ▶ Provides UV protection
- ▶ Stabilizes joint sand from washout, weeds & ants
- ▶ Color enhancing
- ▶ See chart on page 16

Application

- ▶ Concrete Pavers

Paver Seal™ HG High Gloss

PART #	SIZE	AMT PER CTN	QUANTITY	PART #	SIZE	AMT PER CTN	QUANTITY
SSSPRO CTN	1 GAL	4/CTN	36 CTNS/PLT	SSSPRO 5GAL	5 GAL	1	36/PLT

PREMIUM SEAL™

PSX PENETRATING X-TREME



Features

- ▶ Water-based
- ▶ Covers up to 200 sq. ft. per gallon
- ▶ Invisible/Natural-Hook finish
- ▶ Ideal for high traffic areas
- ▶ Minimizes salt & freeze/thaw damage
- ▶ Interior/exterior applications
- ▶ See chart on page 16

Application

- ▶ Concrete Pavers
- ▶ Clay Pavers
- ▶ Concrete Permeable Pavers
- ▶ Wetcast
- ▶ Block Retaining Walls
- ▶ Manufactured Stone

Premium Seal™ PSX Penetrating X-treme

PART #	SIZE	AMT PER CTN	QUANTITY	PART #	SIZE	AMT PER CTN	QUANTITY
SSPC PSX CTN	1 GAL	4/CTN	36 CTNS/PLT	SSPC PSX 5 GAL	5 GAL	1	36/PLT

LGX LOW GLOSS X-TREME



Features

- ▶ Solvent-based
- ▶ Covers up to 250 sq. ft. per gallon
- ▶ Low-gloss finish
- ▶ High color enhancement
- ▶ Minimizes salt & freeze/thaw damage
- ▶ Provides UV protection
- ▶ Ideal for high traffic areas
- ▶ See chart on page 16

Application

- ▶ Concrete Pavers
- ▶ Wetcast
- ▶ Granite/Quartz
- ▶ Marble/Travertine
- ▶ Limestone
- ▶ Manufactured Stone
- ▶ Stamped Concrete

Premium Seal™ LGX Low Gloss X-treme

PART #	SIZE	AMT PER CTN	QUANTITY	PART #	SIZE	AMT PER CTN	QUANTITY
SSPC LGX CTN	1 GAL	4/CTN	36 CTNS/PLT	SSPC LGX 5GAL	5 GAL	1	36/PLT

Premium Seal™ LGX VOC Low Gloss X-treme

PART #	SIZE	AMT PER CTN	QUANTITY	PART #	SIZE	AMT PER CTN	QUANTITY
SSPC LGX VOC CTN	1 GAL	4/CTN	36 CTNS/PLT	SSPC LGX VOC 5GAL	5 GAL	1	36/PLT

HGX HIGH GLOSS X-TREME



Features

- ▶ Solvent-based
- ▶ Covers up to 250 sq. ft. per gallon
- ▶ High-gloss, wet-look finish
- ▶ Minimizes salt & freeze/thaw damage
- ▶ Provides UV protection
- ▶ Ideal for high traffic areas
- ▶ Color enhancing
- ▶ See chart on page 16

Application

- ▶ Concrete Pavers
- ▶ Wetcast
- ▶ Granite/Quartz
- ▶ Marble/Travertine
- ▶ Limestone
- ▶ Manufactured Stone
- ▶ Stamped Concrete

Premium Seal™ HGX High Gloss X-treme

PART #	SIZE	AMT PER CTN	QUANTITY	PART #	SIZE	AMT PER CTN	QUANTITY
SSPC HGX CTN	1 GAL	4/CTN	36 CTNS/PLT	SSPC HGX 5GAL	5 GAL	1	36/PLT

Premium Seal™ HGX VOC High Gloss X-treme

PART #	SIZE	AMT PER CTN	QUANTITY	PART #	SIZE	AMT PER CTN	QUANTITY
SSPC HGX VOC CTN	1 GAL	4/CTN	36 CTNS/PLT	SSPC HGX VOC 5GAL	5 GAL	1	36/PLT

DG DUAL GUARD



Features

- ▶ Solvent-based
- ▶ Covers up to 250 sq. ft. per gallon
- ▶ High-gloss, wet-look finish
- ▶ Minimizes salt & freeze/thaw damage
- ▶ Provides UV protection
- ▶ Ideal for high traffic areas
- ▶ Color enhancing
- ▶ See chart on page 16

Application

- ▶ Concrete Pavers
- ▶ Wetcast
- ▶ Granite/Quartz
- ▶ Marble/Travertine
- ▶ Limestone
- ▶ Block Retaining Wall
- ▶ Manufactured Stone
- ▶ Stamped Concrete

Premium Seal™ DG Dual Guard

PART #	SIZE	AMT PER CTN	QUANTITY	PART #	SIZE	AMT PER CTN	QUANTITY
SSDG CTN	1 GAL	4/CTN	36 CTNS/PLT	SSDG 5GAL	5 GAL	1	36/PLT



Premium Seal™ DG Dual Guard VOC

PART #	SIZE	AMT PER CTN	QUANTITY	PART #	SIZE	AMT PER CTN	QUANTITY
SSDG VOC CTN	1 GAL	4/CTN	36 CTNS/PLT	SSDG VOC 5GAL	5 GAL	1	36/PLT

Clean Before Sealing for the Best Bond

Removing all surface stains is essential to getting the best looking seal. If needed, start by using **Specialty Cleaners™** to remove specific issues. Whether or not you use **Specialty Cleaners™** SRW always recommends the use of **General Purpose™** cleaners prior to sealing a project.

▶ SEE CLEANING HOW-TO VIDEOS

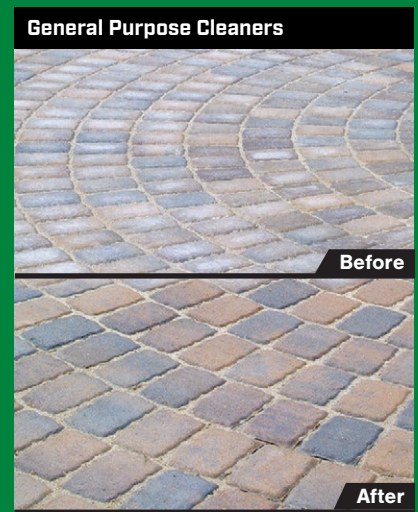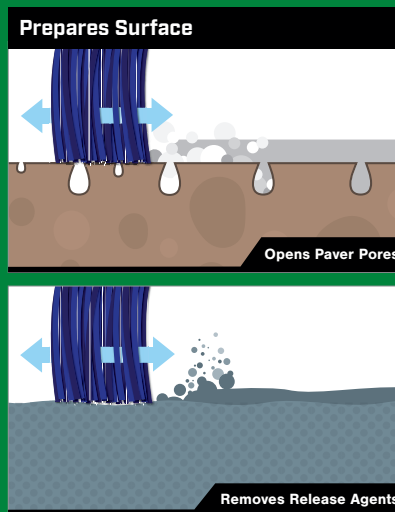

SEALERS

Sealer Accessories



SPRAYER

To accompany our high-quality sealers we also offer a sealer sprayer to get the job done right! We're your one-stop-shop. *pg 56*



SLIT FOAM ROLLERS

SRW Slit Foam Rollers are a must-use product when sealing. They help ensure even application. Don't get caught without one on your next project. *pg 56*



SR SLIP-RESIST™

SR Slip-Resist™ is a slip-resistant polypropylene particle mixture that can be added to film-forming sealers to create a textured surface, improving slip resistance. Great around pools! *pg 56*

SPECIALTY SEAL™

PRX PAVER RESTORE X-TREME™



Features

- ▶ Solvent-based
- ▶ Covers up to 250 sq. ft. per gallon
- ▶ Restores faded pavers with color reviving technology
- ▶ Adds rich color to older pavers
- ▶ High gloss, wet look, restoring pigmented sealer
- ▶ Highly durable, long lasting protection for extreme conditions
- ▶ See chart on page 16

Application

- ▶ Concrete Pavers
- ▶ Granite/Quartz
- ▶ Marble/Travertine
- ▶ Limestone
- ▶ Exposed Aggregate Concrete

Specialty Seal™ PRX Paver Restore X-treme™

PART #	SIZE	AMT PER CTN	QUANTITY	PART #	SIZE	AMT PER CTN	QUANTITY
SSPC PRX CTN	1 GAL	4/CTN	36 CTNS/PLT	SSPC PRX 5GAL	5 GAL	1	36/PLT

Specialty Seal™ PRX VOC Paver Restore X-treme™

PART #	SIZE	AMT PER CTN	QUANTITY	PART #	SIZE	AMT PER CTN	QUANTITY
SSPC PRX VOC CTN	1 GAL	4/CTN	36 CTNS/PLT	SSPC PRX VOC 5GAL	5 GAL	1	36/PLT

SGX STAIN GUARD X-TREME™



Features

- ▶ Water-based
- ▶ Covers up to 200 sq. ft. per gallon
- ▶ Protects against stains from chemicals, grease & oil
- ▶ Minimizes salt & freeze/thaw damage
- ▶ Invisible/Natural-Look finish
- ▶ Ideal for driveways & commercial applications
- ▶ See chart on page 16

Application

- ▶ Concrete Pavers
- ▶ Clay Pavers
- ▶ Wetcast
- ▶ Block Retaining Wall

Specialty Seal™ SGX Stain Guard X-treme™

PART #	SIZE	AMT PER CTN	QUANTITY	PART #	SIZE	AMT PER CTN	QUANTITY
SSPC SGX CTN	1 GAL	4/CTN	36 CTNS/PLT	SSPC SGX 5GAL	5 GAL	1	36/PLT

JS JOINT STABILIZER™



Features

- ▶ Water-based
- ▶ Seals & stabilizes standard joints: Covers up to 80 -120 sq. ft. per gallon
- ▶ Cured polymeric sand: Covers up to 125 sq. ft. per gallon
- ▶ Joint widths up to ¾"
- ▶ 2-in-1: seals surface & stabilizes joints
- ▶ Eliminates joint washout
- ▶ Reduces weeds & ant infestation
- ▶ Natural-look/matte finish
- ▶ Resists moss, mold & mildew growth
- ▶ Residential & commercial
- ▶ See chart on page 16

Application

- ▶ Concrete Pavers
- ▶ Clay Pavers
- ▶ Wetcast

Specialty Seal™ JS Joint Stabilizer™

PART #	SIZE	AMT PER CTN	QUANTITY	PART #	SIZE	AMT PER CTN	QUANTITY
SSJS CTN	1 GAL	4/CTN	36 CTNS/PLT	SSJS 5GAL	5 GAL	1	36/PLT

CG COUNTER GUARD™



Features

- ▶ Solvent-based
- ▶ Covers up to 75 sq. ft. per quart
- ▶ Invisible/Natural-Look finish
- ▶ Dirty oil wipes right off
- ▶ Protects surfaces from staining do to water, oils, grease, wine, coffee, foods & more
- ▶ See chart on page 16

Application

- ▶ Wetcast
- ▶ Granite/Quartz
- ▶ Marble/Travertine
- ▶ Limestone
- ▶ Bluestone/Sandstone
- ▶ Block Retaining Wall
- ▶ Manufactured Stone

Specialty Seal™ CG Counter Guard™

PART #	SIZE	AMT PER CTN
SSCG CTN QT4	1 QT	4/CTN

S-PS PENETRATING



Features

- ▶ Solvent-based
- ▶ Covers up to 200 sq. ft. per gallon
- ▶ Invisible/natural-look finish
- ▶ Protects surface from staining
- ▶ Ideal for outdoor applications
- ▶ Minimizes salt & freeze/thaw damage
- ▶ See chart on page 16

Application

- ▶ Granite/Quartz
- ▶ Marble/Travertine
- ▶ Limestone
- ▶ Bluestone/Sandstone
- ▶ Manufactured Stone

Specialty Seal™ S-PS Penetrating

PART #	SIZE	AMT PER CTN	QUANTITY	PART #	SIZE	AMT PER CTN	QUANTITY
STONE S-PS CTN	1 GAL	4/CTN	36 CTNS/PLT	STONE S-PS 5GAL	5 GAL	1	36/PLT

Specialty Seal™ S-PS VOC Penetrating

PART #	SIZE	AMT PER CTN	QUANTITY	PART #	SIZE	AMT PER CTN	QUANTITY
STONE S-PS VOC CTN	1 GAL	4/CTN	36 CTNS/PLT	STONE S-PS VOC 5GAL	5 GAL	1	36/PLT

S-PSX PENETRATING X-TREME



Features

- ▶ Solvent-based
- ▶ Covers up to 200 sq. ft. per gallon
- ▶ Stain preventer technology
- ▶ Invisible/Natural-look finish
- ▶ Recommended for high traffic walkways & commercial applications
- ▶ See chart on page 16

Application

- ▶ Granite/Quartz
- ▶ Marble/Travertine
- ▶ Limestone
- ▶ Bluestone/Sandstone
- ▶ Manufactured Stone

Specialty Seal™ S-PSX Penetrating X-treme

PART #	SIZE	AMT PER CTN	QUANTITY	PART #	SIZE	AMT PER CTN	QUANTITY
STONE S-PSX CTN	1 GAL	4/CTN	36 CTNS/PLT	STONE S-PSX 5GAL	5 GAL	1	36/PLT



PRIOR TO SEALING A SURFACE

Whether using a penetrating sealer or a film forming sealer, SRW strongly recommends a **two** person step application.

- PERSON ONE:** Spray the sealer to ensure an even coat.
- PERSON TWO:** Roll the surface with one of our select foam rollers to ensure sealer is evenly distributed & does not pool in the joints or texture of the material in which it is applied.



CLEANERS

The best seal starts with a clean surface, & each hardscape surface has distinctly different qualities. Whether it's removing dirt from natural stone or residue from wetcast, we've designed our cleaners to give you the best cleaning power for each surface type.



SURFACE APPLICATION

CONCRETE PAVERS

CLAY PAVERS

CONCRETE PERMEABLE PAVERS

WETCAST

GRANITE/QUARTZ

MARBLE/TRAVERTINE

LIMESTONE

BLUESTONE/SANDSTONE

BLOCK RETAINING WALLS

MANUFACTURED STONE

STAMPED CONCRETE

CLEANER CATEGORY

CLEANERS	SURFACE APPLICATION											GENERAL CLEAN
	CONCRETE PAVERS	CLAY PAVERS	CONCRETE PERMEABLE PAVERS	WETCAST	GRANITE/QUARTZ	MARBLE/TRAVERTINE	LIMESTONE	BLUESTONE/SANDSTONE	BLOCK RETAINING WALLS	MANUFACTURED STONE	STAMPED CONCRETE	
PW PAVER WASH	■	■							■			GENERAL CLEAN
DW DUAL WASH				■	■	■	■	■				
EF EFFLORESCENCE	■	■							■			SPECIALTY CLEAN
M ³ C MOLD, MOSS & MILDEW	■	■	■	■	■	■	■	■	■	■	■	
CDX CLEANER DEGREASER X-TREME	■	■	■	■	■	■	■	■	■	■		
RE RUST ELIMINATOR	■	■			■			■	■			
OC ORGANIC STAIN CLEANER	■	■		■	■	■	■	■	■	■		
XY XYLENE SOLVENT	■			■	■	■		■	■	■		
SS SEALER STRIPPER	■	■		■	■	■	■	■	■			

Always test a small area. Check product label for interior/exterior use. Refer to surface material manufacturer's recommendations on whether or not to seal.

GENERAL CLEAN

PW PAVER WASH



Features

- ▶ Covers up to 200 sq. ft. per gallon
- ▶ Opens surface pores for optimal bond with sealer
- ▶ Removes polyhaze, efflorescence & ground-in dirt
- ▶ Restores original paver color
- ▶ Contains no muriatic acid or hydrochloric acid
- ▶ See chart on page 23

Application

- ▶ Concrete Pavers
- ▶ Clay Pavers
- ▶ Block Retaining Wall

Paver Clean™ PW Paver Wash

PART #	SIZE	AMT PER CTN	QUANTITY	PART #	SIZE	AMT PER CTN	QUANTITY
SSPW CTN	1 GAL	4/CTN	36 CTNS/PLT	SSPW 5GAL	5 GAL	1	36/PLT

DW DUAL WASH™



Features

- ▶ Covers up to 200 sq. ft. per gallon
- ▶ Removes ground-in dirt, light grease & oil
- ▶ Easy-to-use, concentrated solution
- ▶ Contains no acid
- ▶ See chart on page 23

Application

- ▶ Wetcast
- ▶ Granite/Quartz
- ▶ Marble/Travertine
- ▶ Limestone
- ▶ Bluestone/Sandstone

DW Dual Wash™

PART #	SIZE	AMT PER CTN	QUANTITY	PART #	SIZE	AMT PER CTN	QUANTITY
SSDW CTN	1 GAL	4/CTN	36 CTNS/PLT	SSDW 5GAL	5 GAL	1	36/PLT



REMOVING GREASE STAINS

The grease stain seen on page 22 can be easily fixed with the use of CDX & a pressure washer.

CLEANERS

SPECIALTY CLEAN™

EF EFFLORESCENCE REMOVER



Features

- ▶ Covers up to 200 sq. ft. per gallon
- ▶ Dissolves mineral deposits (efflorescence)
- ▶ Restores original surface color
- ▶ Contains no muriatic acid or hydrochloric acid
- ▶ Ready to use—no diluting needed
- ▶ See chart on page 23

Application

- ▶ Concrete Pavers
- ▶ Clay Pavers
- ▶ Block Retaining Wall

Specialty Clean™ EF Efflorescence Remover

PART #	SIZE	AMT PER CTN	QUANTITY	PART #	SIZE	AMT PER CTN	QUANTITY
SSE CTN	1 GAL	4/CTN	36 CTNS/PLT	SSE 5GAL	5 GAL	1	36/PLT

MC MOLD, MOSS & MILDEW CLEANER



Features

- ▶ Covers up to 2,200 sq. ft. per gallon of concentrate
- ▶ Breaks down mold, moss, mildew, lichen & algae
- ▶ Non-acidic, no-bleach formula
- ▶ No pressure washing, scrubbing or rinsing
- ▶ See chart on page 23

Application

- ▶ Concrete Pavers
- ▶ Clay Pavers
- ▶ Concrete Permeable Pavers
- ▶ Wetcast
- ▶ Granite/Quartz
- ▶ Marble/Travertine
- ▶ Limestone
- ▶ Bluestone/Sandstone
- ▶ Block Retaining Wall
- ▶ Manufactured Stone
- ▶ Stamped Concrete

Specialty Clean™ MC Mold, Moss & Mildew Cleaner

PART #	SIZE	QUANTITY	PART #	SIZE	AMT PER CTN	QUANTITY
SSMC CTN QT4	1 QT	4/CTN	SSMC CTN GAL4	1 GAL	4/CTN	36 CTNS/PLT

CDX CLEANER & DEGREASER X-TREME



Features

- ▶ Coverage varies, spot treat as needed
- ▶ Fast-acting concentrated formula
- ▶ Rinses clean with water
- ▶ Removes Oil, Grease, Tar, Gum, Rubber, & Paint
- ▶ See chart on page 23

Application

- ▶ Concrete Pavers
- ▶ Clay Pavers
- ▶ Concrete Permeable Pavers
- ▶ Wetcast
- ▶ Granite/Quartz
- ▶ Marble/Travertine
- ▶ Limestone
- ▶ Bluestone/Sandstone
- ▶ Block Retaining Wall
- ▶ Manufactured Stone

Specialty Clean™ CDX Cleaner & Degreaser X-treme

PART #	SIZE	QUANTITY
SSCDX CTN 4	1 QT	4/CTN



USING A PRESSURE WASHER TO REMOVE STAINS

When using CDX or OC pressure washer nozzle should start 6" away from the surface & move down until you see that stain being removed.

Typically, you will find that the most effective distance ends up being 1-1.5" from the surface. A 15 degree nozzle (yellow) will work best.

RE RUST ELIMINATOR



Features

- ▶ Coverage varies, spot treat as needed
- ▶ Removes rust & hard water stains
- ▶ Rinses clean with water
- ▶ Heavy-duty concentrated formula
- ▶ See chart on page 23

Application

- ▶ Concrete Pavers
- ▶ Clay Pavers
- ▶ Granite/Quartz
- ▶ Bluestone/Sandstone
- ▶ Block Retaining Wall

Specialty Clean™ RE Rust Eliminator

PART #	SIZE	QUANTITY
SSRE CTN 4	1 QT	4/CTN

OC ORGANIC STAIN CLEANER



Features

- ▶ Breaks down organic stains from leaves, wood tannins, pine needles, acorns, fruit, wine, etc.
- ▶ Rinses clean with water
- ▶ See chart on page 23
- ▶ Coverage varies, spot treat as needed

Application

- ▶ Concrete Pavers
- ▶ Clay Pavers
- ▶ Wetcast
- ▶ Granite/Quartz
- ▶ Marble/Travertine
- ▶ Limestone
- ▶ Bluestone/Sandstone
- ▶ Block Retaining Wall
- ▶ Manufactured Stone

Specialty Clean™ OC Organic Stain Cleaner

PART #	SIZE	QUANTITY
SSOC 2LB CTN 4	2 LBS	4/CTN

XY XYLENE SOLVENT



Features

- ▶ Covers up to 200 sq. ft. per gallon
- ▶ Fast-acting solvent
- ▶ Aids in cleanup of tools
- ▶ Removes unwanted overspray
- ▶ Thins & dissolves acrylic sealers
- ▶ Removes trapped moisture in most film-forming sealers
- ▶ See chart on page 23

Application

- ▶ Concrete Pavers
- ▶ Wetcast
- ▶ Granite/Quartz
- ▶ Marble/Travertine
- ▶ Limestone
- ▶ Block Retaining Wall
- ▶ Manufactured Stone
- ▶ Stamped Concrete

Specialty Clean™ XY Xylene Solvent

PART #	SIZE	AMT PER CTN	QUANTITY	PART #	SIZE	AMT PER CTN	QUANTITY
SSS XY CTN	1 GAL	4/CTN	36 CTNS/PLT	SSS XY 5	5 GAL	1	36/PLT

SS SEALER STRIPPER



Features

- ▶ Covers up to 200 sq. ft. per gallon
- ▶ Industrial strength
- ▶ Graffiti/Dry Fog Paints
- ▶ Tile/Carpet Adhesive
- ▶ Biodegradable
- ▶ Aids in removal of sealing & curing compounds
- ▶ See chart on page 23

Application

- ▶ Concrete Pavers
- ▶ Clay Pavers
- ▶ Wetcast
- ▶ Granite/Quartz
- ▶ Marble/Travertine
- ▶ Limestone
- ▶ Bluestone/Sandstone
- ▶ Block Retaining Wall

Specialty Clean™ SS Sealer Stripper

PART #	SIZE	AMT PER CTN	QUANTITY	PART #	SIZE	AMT PER CTN	QUANTITY
SSS STRIPPER CTN	1 GAL	4/CTN	36 CTNS/PLT	SSS STRIPPER 5	5 GAL	1	36/PLT

LANDSCAPE FABRICS

OVER 40 GEOTEXTILE OPTIONS!

Ensure the long-term performance of your landscape work with SRW geotextiles. We have versatile fabric for any job including general & premium landscape, weed control, stabilization/separation, drainage & filtration & heavy duty erosion control.

GENERAL LANDSCAPING • SPUNBOND



Features

- ▶ 10 - 20 year fabric grade options
- ▶ Most popular fabric line
- ▶ Excellent water flow/permittivity
- ▶ Easy to cut, easy to use
- ▶ Puncture & tear resistant
- ▶ Weed control
- ▶ Commercial grade
- ▶ Strength & versatility

Application

- ▶ Behind Retaining Walls
- ▶ Gardens/Planters
- ▶ General Landscaping
- ▶ French Drains/Drainfields

SB2 • 20 Year • 300' roll color coding green

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FSB2 03025	3'x25'	8.33	62/CTN
FSB2 03050	3'x50'	16.67	34/CTN
FSB2 03100	3'x100'	33.33	18/CTN
FSB2 03300	3'x300'	100.00	42/PLT
FSB2 04025	4'x25'	11.11	62/CTN
FSB2 04050	4'x50'	22.22	34/CTN

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FSB2 04100	4'x100'	44.44	18/CTN
FSB2 04300	4'x300'	133.33	42/PLT
FSB2 06100	6'x100'	66.67	30/PLT
FSB2 06300	6'x300'	200.00	30/PLT
FSB2 12300	12'x300'	400.00	4/BNDL

SB3 • 20 Year • 300' roll color coding yellow

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FSB3 03025	3'x25'	8.33	45/CTN
FSB3 03050	3'x50'	16.67	24/CTN
FSB3 03100	3'x100'	33.33	12/CTN
FSB3 03300	3'x300'	100.00	30/PLT
FSB3 04025	4'x25'	11.11	45/CTN
FSB3 04050	4'x50'	22.22	24/CTN

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FSB3 04100	4'x100'	44.44	12/CTN
FSB3 04300	4'x300'	133.33	30/PLT
FSB3 06100	6'x100'	66.67	32/PLT
FSB3 06300	6'x300'	200.00	30/PLT
FSB3 08300	8'x300'	266.67	4/BNDL
FSB3 12300	12'x300'	400.00	4/BNDL

Silver • 10 Year

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FSSBS 03050	3'x50'	16.67	22/CTN
FSSBS 03100	3'x100'	33.33	10/CTN
FSSBS 03300	3'x300'	100.00	30/PLT
FSSBS 04050	4'x50'	22.22	22/CTN

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FSSBS 04100	4'x100'	44.44	10/CTN
FSSBS 04300	4'x300'	133.33	30/PLT
FSSBS 06100	6'x100'	66.67	32/PLT
FSSBS 06300	6'x300'	200.00	30/PLT

Silver Elite • 20 Year

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FSSBE 03050	3'x50'	16.67	22/CTN
FSSBE 03100	3'x100'	33.33	10/CTN
FSSBE 03300	3'x300'	100.00	30/PLT
FSSBE 04050	4'x50'	22.22	22/CTN
FSSBE 04100	4'x100'	44.44	10/CTN
FSSBE 04300	4'x300'	133.33	30/PLT

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FSSBE 06100	6'x100'	66.67	32/PLT
FSSBE 06300	6'x300'	200.00	30/PLT
FSSBE 09300	9'x300'	300.00	4/BNDL
FSSBE 12300	12'x300'	400.00	4/BNDL
FSSBE 15300	15'x300'	500.00	4/BNDL



HIGH-QUALITY
INSTALLS
JUST GOT

FASTER



WATCH HERE FOR
HEXABASE GRASS/GRAVEL
INSTALLATION VIDEO

pg 43

WEED CONTROL • POLYSPUN



Features

- ▶ 15 - 30 year fabric grade options
- ▶ Highest quality fabric
- ▶ Creates a weed barrier
- ▶ Allows air, water & nutrients to pass through
- ▶ Promotes healthy plants by reducing weed growth

Application

- ▶ Underlayment for Mulch & Decorative Rock
- ▶ Gardens & Landscapes
- ▶ Separation

Residential • PS1.5 • 15 Year

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FPS1.5 03050	3'x50'	16.67	26/CTN
FPS1.5 03100	3'x100'	33.33	14/CTN

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FPS1.5 03300	3'x300'	100.00	42/PLT

Contractor • PS2 • 20 Year • 300' roll color coding white

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FPS2 03050	3'x50'	16.67	23/CTN
FPS2 03100	3'x100'	33.33	12/CTN
FPS2 03300	3'x300'	100.00	30/PLT
FPS2 04050	4'x50'	22.22	23/CTN
FPS2 04100	4'x100'	44.44	12/CTN

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FPS2 04300	4'x300'	133.33	30/PLT
FPS2 06100	6'x100'	66.67	32/PLT
FPS2 06300	6'x300'	200.00	20/PLT
FPS2 08300	8'x300'	266.67	4/BNDL

Professional • PS3 • 30 Year • 300' roll color coding tan

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FPS3 03050	3'x50'	16.67	18/CTN
FPS3 03100	3'x100'	33.33	9/CTN
FPS3 03300	3'x300'	100.00	30/PLT
FPS3 04050	4'x50'	22.22	18/CTN
FPS3 04100	4'x100'	44.44	9/CTN

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FPS3 04300	4'x300'	133.33	30/PLT
FPS3 06100	6'x100'	66.67	35/PLT
FPS3 06300	6'x300'	200.00	20/PLT
FPS3 08300	8'x300'	266.67	4/BNDL
FPS3 12300	12'x300'	400.00	4/BNDL

CHOOSE YOUR FABRIC



GENERAL LANDSCAPING SPUNBOND	WEED CONTROL POLYSPUN	PREMIUM LANDSCAPE PRO PLUS & GROUND COVER	STABILIZATION & SEPARATION WOVEN	EROSION CONTROL NON-WOVEN
<p>PRIMARY USE</p> <p>Under Rock/Mulch Planters French Drains Drainfields</p> <p>BENEFITS</p> <p>Water Flow Easy to cut & install Puncture Resistant High Strength Permeable for Water & Nutrients</p>	<p>PRIMARY USE</p> <p>Weed Control Under Rock/Mulch</p> <p>BENEFITS</p> <p>Weed Barrier Easy to Install Permeable for Water & Nutrients</p>	<p>PRIMARY USE</p> <p>Landscape Beds Gardens Patios Sidewalks</p> <p>BENEFITS</p> <p>Woven High Strength Non-Woven Permeability* High UV Protection Can Be Left Exposed Planting Stripes Weed Control Permeable for Water & Nutrients*</p> <p>*Only applies to Pro-Plus Fabrics</p>	<p>PRIMARY USE</p> <p>All Paver Projects Roads Driveways Retaining Wall Base</p> <p>BENEFITS</p> <p>High Strength Project Longevity Puncture Resistant Reduce Base Material Won't Rot or Mildew High Water Flow*</p> <p>*Only applies to Permeable 350 Fabric</p>	<p>PRIMARY USE</p> <p>Heavy Rip-Rap Boulder Retaining Walls</p> <p>BENEFITS</p> <p>High Strength High Water Flow Won't Rot or Mildew Prevents Soil Erosion Stabilization/Separation</p>

PREMIUM LANDSCAPE • PRO PLUS & GROUND COVER



Features

- ▶ Strength of a woven, permittivity of a non-woven
- ▶ Colored planting stripes make spacing quick & easy
- ▶ Ground cover has highest UV protection
- ▶ Retains moisture for plant health
- ▶ Weed control

Application

- ▶ Soil/Landscape Stabilization
- ▶ Weed Barrier Under Landscape Beds, Gardens, Decks, Patios & Sidewalks

Pro Plus IV • Large roll color coding orange

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FPP1V 03025	3'x25'	8.33	34/CTN
FPP1V 03050	3'x50'	16.67	15/CTN
FPP1V 03100	3'x100'	33.33	8/CTN
FPP1V 03250	3'x250'	83.33	20/PLT
FPP1V 04050	4'x50'	22.22	15/CTN

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FPP1V 04100	4'x100'	44.44	8/CTN
FPP1V 04250	4'x250'	111.11	20/PLT
FPP1V 06100	6'x100'	66.67	35/PLT
FPP1V 06250	6'x250'	166.66	20/PLT
FPP1V 12250	12'x250'	333.33	4/BNDL

Pro Plus V • Folded

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FPPV 08250F	8'x250'	222.22	9/PLT - 4/BNDL

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FPPV 12250F	12'x250'	333.33	4/BNDL

Pro Plus V • Large roll color coding blue

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FPPV 03250	3'x250'	83.33	20/PLT
FPPV 04250	4'x250'	111.11	20/PLT
FPPV 05250	5'x250'	138.89	20/PLT

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FPPV 06250	6'x250'	166.66	20/PLT
FPPV 08250	8'x250'	222.22	4/BNDL
FPPV 12250	12'x250'	333.33	4/BNDL

GC3 • Ground Cover • Folded

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FGC3 12300F	12'x300'	400.00	4/BNDL

GC3 • Ground Cover

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FGC3 03050	3'x50'	16.67	30/CTN
FGC3 03100	3'x100'	33.33	15/CTN
FGC3 03300	3'x300'	100.00	42/PLT
FGC3 04300	4'x300'	133.33	42/PLT
FGC3 06100	6'x100'	66.67	30/PLT


PART #	SIZE	SQ YDS/ROLL	QUANTITY
FGC3 06300	6'x300'	200.00	30/PLT
FGC3 10300	10'x300'	333.33	3/BNDL
FGC3 12300	12'x300'	400.00	3/BNDL
FGC3 15300	15'x300'	500.00	3/BNDL

GC Pro • Ground Cover • Large roll color coding purple

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FGCPRO 03300	3'x300'	100.00	30/PLT
FGCPRO 04300	4'x300'	133.33	30/PLT
FGCPRO 06300	6'x300'	200.00	30/PLT
FGCPRO 06500*	6'x500'	333.33	20/PLT

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FGCPRO 10300	10'x300'	333.33	3/BNDL
FGCPRO 12300	12'x300'	400.00	3/BNDL
FGCPRO 155300	15.5'x300'	516.66	3/BNDL

*Made To Order

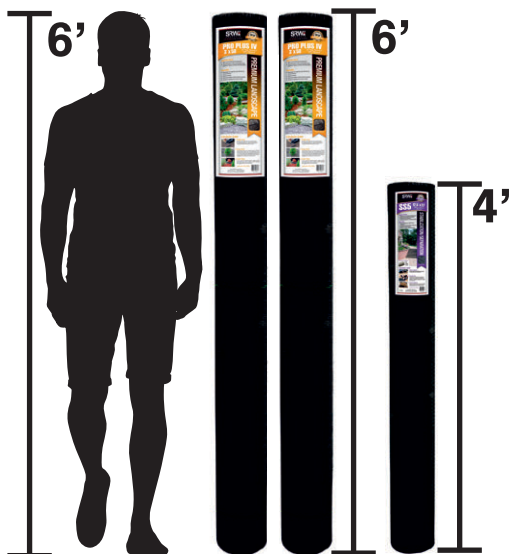

These 12.5' & up rolls are folded before rolling for easier storage & display as smaller more compact rolls.



STABILIZATION/SEPARATION • WOVEN



Features

- ▶ SS5 meets most DOT specs
- ▶ Convenient sizes: SS5 is available in folded widths
- ▶ Improves long-term performance of projects
- ▶ Excellent puncture & tear resistance
- ▶ SS5 can reduce amount of base materials needed
- ▶ Permeable 350 has high strength & great water flow

Application

- ▶ Stabilize standard & permeable paver projects
- ▶ Base reinforcement for roads, driveways & sidewalks
- ▶ SS5 works great in structural support for retaining wall base

Permeable 350 • 350 lb • Monofilament Woven

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FPE350 0625100	6.25' x 100'	69.44	30/PLT
FPE350 0625300	6.25' x 300'	208.33	20/PLT

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FPE350 125300	12.5' x 300'	416.66	3/BNDL

SS5 • 200 lb • Woven Slit Film • Folded

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FSS5 125027	12.5' x 27'	37.50	8/CTN
FSS5 125054	12.5' x 54'	75.00	30/PLT
FSS5 125108	12.5' x 108'	150.00	20/PLT

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FSS5 1750515	17.5' x 51.5'	100.00	20/PLT
FSS5 175103	17.5' x 103'	200.00	16/PLT

SS5 • 200 lb • Woven Slit Film


PART #	SIZE	SQ YDS/ROLL	QUANTITY
FSS5 04050	4' x 50'	22.22	20/CTN
FSS5 04100	4' x 100'	44.44	11/CTN
FSS5 06050	6' x 50'	33.33	1
FSS5 06100	6' x 100'	66.67	20/BNDL-80/PLT

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FSS5 06300	6' x 300'	200.00	16/PLT
FCSS5 125432	12.5' x 432'	600.00	3/BNDL
FCSS5 15360	15' x 360'	600.00	3/BNDL
FCSS5 175309	17.5' x 309'	600.00	3/BNDL


*See SS6 on pg 31

FABRIC

TYPICAL INSTALLATION OF SS5 FABRIC UNDER PAVERS

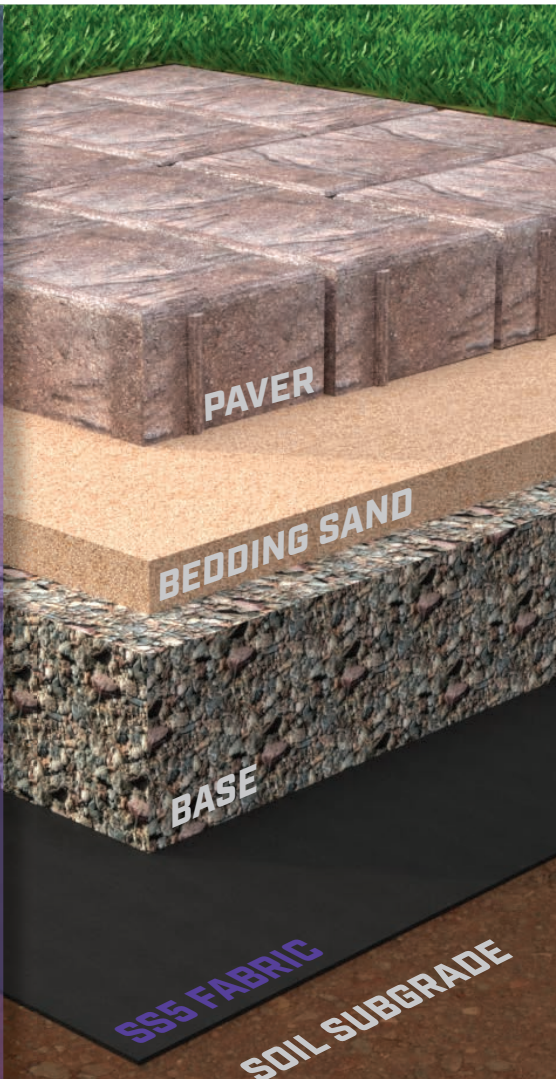

FABRIC FOR PERMEABLE INSTALLATIONS INCLUDING HYBRID GRADED BASE

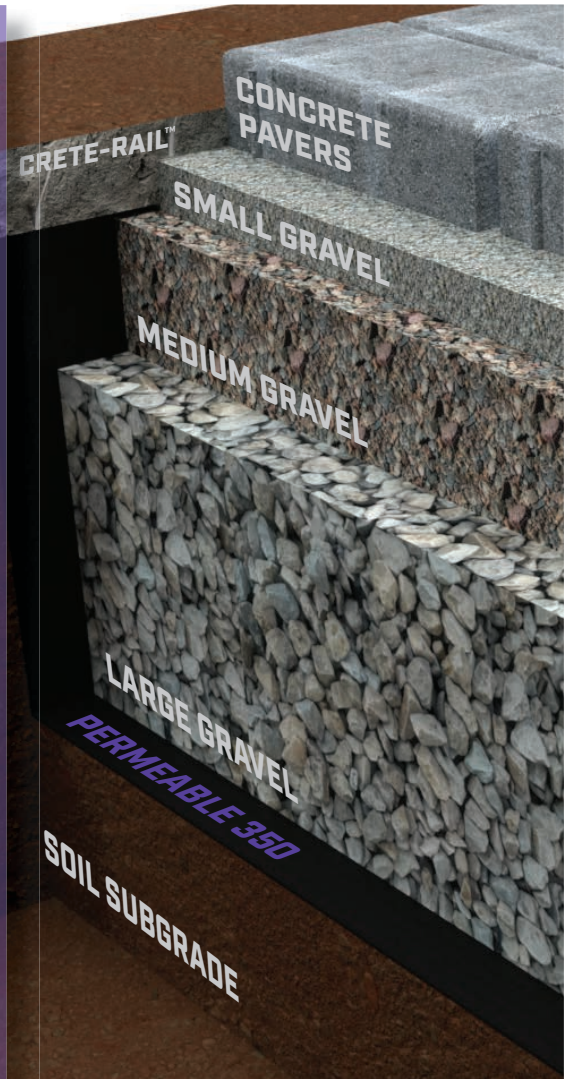

DRAINAGE & FILTRATION • NON-WOVEN



Features

- ▶ Up to 6 oz. options
- ▶ Dimensionally stable
- ▶ Allows high water flow
- ▶ Soil separation for added stability
- ▶ High strength/dimensionally stable
- ▶ Promotes healthy vegetation
- ▶ Rot & mildew resistant

Application

- ▶ Drainage Protection
- ▶ Filtration
- ▶ Stabilization/Separation
- ▶ General Landscape
- ▶ Erosion Control

LS3 • General Landscape & Filtration Fabric

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FLS3 03025	3'x25'	8.33	26/CTN
FLS3 03050	3'x50'	16.67	15/CTN
FLS3 03100	3'x100'	33.33	42/PLT
FLS3 03300	3'x300'	100.00	16/PLT
FLS3 04050	4'x50'	22.22	15/CTN
FLS3 04100	4'x100'	44.44	42/PLT

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FLS3 04300	4'x300'	133.33	16/PLT
FLS3 06100	6'x100'	66.67	30/PLT
FLS3 06300	6'x300'	200.00	12/PLT
FLS3 09300	9'x300'	300.00	3/BNDL
FLS3 12300	12'x300'	400.00	3/BNDL

NW4 • Drainage & Filtration Fabric

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FNW4 03100	3'x100'	33.33	42/PLT
FNW4 03300	3'x300'	100.00	16/PLT
FNW4 04100	4'x100'	44.44	42/PLT
FNW4 04300	4'x300'	133.33	16/PLT

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FNW4 06100	6'x100'	66.67	24/PLT
FNW4 06300	6'x300'	200.00	12/PLT
FCNW4 125360	12.5'x360'	500.00	3/BNDL
FCNW4 15360	15'x360'	600.00	3/BNDL

NW4.5 • Drainage & Filtration Fabric

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FNW4.5 03100	3'x100'	33.33	42/PLT
FNW4.5 03300	3'x300'	100.00	16/PLT
FNW4.5 04050	4'x50'	22.22	9/CTN
FNW4.5 04100	4'x100'	44.44	42/PLT
FNW4.5 04300	4'x300'	133.33	16/PLT

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FNW4.5 06100	6'x100'	66.67	24/PLT
FNW4.5 06300	6'x300'	200.00	12/PLT
FCNW4.5 125360	12.5'x360'	500.00	3/BNDL
FCNW4.5 15360	15'x360'	600.00	3/BNDL

NW6 • Drainage & Filtration Fabric



PART #	SIZE	SQ YDS/ROLL	QUANTITY
FNW6 06300	6'x300'	200.00	9/PLT
FCNW6 10100	10'x100'	111.11	6/BNDL
FCNW6 10300	10'x300'	333.33	3/BNDL

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW6 125360	12.5'x360'	500.00	3/BNDL
FCNW6 15300	15'x300'	500.00	3/BNDL



INSTALLING NON-WOVEN FABRIC

Make sure to overlap seams & use staples to hold fabric during installation.

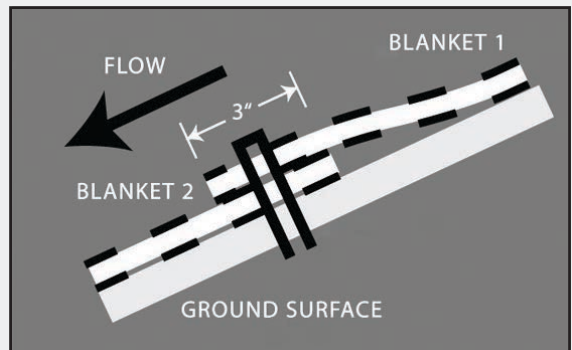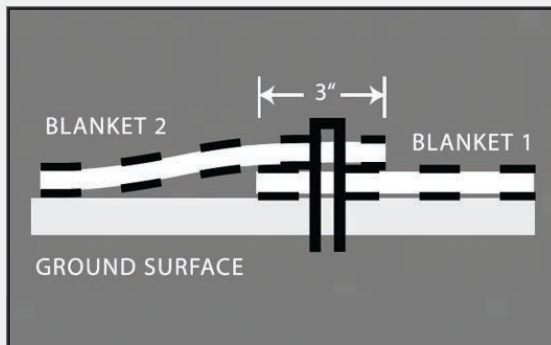

FOR A FASTER INSTALLATION

Using an SRW Products staple setter can make fabric installation faster without having to bend over during install.

HEAVY DUTY EROSION CONTROL • NON-WOVEN



Features

- ▶ Up to 16 oz. options
- ▶ Heavy duty fabrics
- ▶ Allows high water flow
- ▶ Soil separation for added stability
- ▶ High strength/dimensionally stable
- ▶ Prevents soil erosion
- ▶ Rot & mildew resistant

Application

- ▶ Heavy Rip-Rap/Boulder Retaining Walls
- ▶ Stabilization/Separation
- ▶ Erosion Control
- ▶ Underlayment

NW7 • Heavy Duty Erosion Control Fabric

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW7 15300	15'x300'	500.00	3/BNDL

EC8 • Heavy Duty Erosion Control Fabric

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FEC8 06100	6'x100'	66.67	20/PLT
FEC8 06300	6'x300'	200.00	9/PLT

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCEC8 125360	12.5'x360'	500.00	3/BNDL
FCEC8 15300	15'x300'	500.00	3/BNDL

NW10 • Heavy Duty Non-Woven

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW10 125360	12.5'x360'	500.00	3/BNDL

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW10 15300	15'x300'	500.00	3/BNDL

NW12 • Heavy Duty Non-Woven

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW12 125360	12.5'x360'	500.00	1


PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW12 15300	15'x300'	500.00	1

NW16 • Heavy Duty Non-Woven

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW16 125360	12.5'x360'	500.00	1
FCNW16 15150	15'x150'	250.00	1

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW16 15300	15'x300'	500.00	1

FABRIC

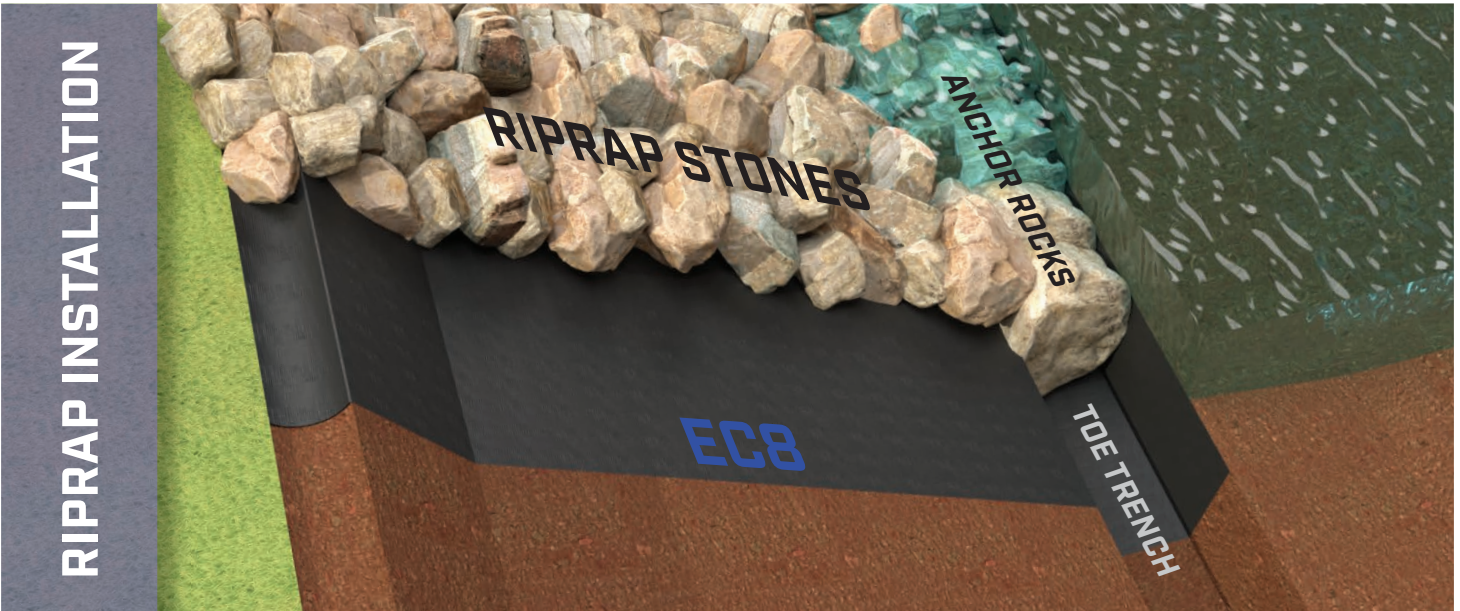

GEOTEXTILE SPECIFICATIONS			NON-WOVEN FABRICS				WOVEN FABRICS	
PROPERTIES	TEST	UNITS	NW4	NW4.5	NW6	EC8	SS5	SS6
Weight (typical)	D5261	oz/sq yd	4	4.5	6	8	4	6
Grab Tensile Strength	D4632	lbs	100	120	160	205	200	315
Grab Elongation	D4632	%	50	50	50	50	15	15
Trap-Tear Strength	D4533	lbs	45	50	60	85	75	120
CBR Puncture	D6241	lbs	300	340	410	535	700	900
Water Flow Rate	D4491	gpm/ft ²	140	135	110	95	5	4
Permittivity	D4491	1/sec	2	1.7	1.5	1.4	.05	.05
UV Resistance (500 hr)	D4355	%	70	70	70	70	70	70
Apparent Opening Size	D4751	US Sieve	70	70	70	80	40	40

Specifications current at the time of printing. Call SRW Products 800-752-9326 for inquiries.

CONSTRUCTION ROLLS • WOVEN

SS5 • 200 lb. • Woven Slit Film

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCSS5 125432	12.5'x432'	600.00	3/BNDL
FCSS5 15360	15'x360'	600.00	3/BNDL

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCSS5 175309	17.5'x309'	600.00	3/BNDL

SS6 • 315 lb. • Woven Slit Film

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCSS6 125360	12.5'x360'	500.00	3/BNDL
FCSS6 15300	15'x300'	500.00	3/BNDL

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCSS6 175258	17.5'x258'	500.00	3/BNDL

SRW 270HP • High Strength Woven • *Direct Ship*

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FC270HP 15300	15'x300'	500.00	3/BNDL

SRW 370HP • High Strength Woven • *Direct Ship*

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FC370HP 15300	15'x300'	500.00	3/BNDL

SRW 570HP • High Strength Woven • *Direct Ship*

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FC570HP 15300	15'x300'	500.00	3/BNDL

SRW MM402 • Monofilament • *Direct Ship*

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FC402MM 12300	12'x300'	400.00	3/BNDL

SRW MM403 • Monofilament • *Direct Ship*

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FC403MM 15300	15'x300'	500.00	3/BNDL

SRW MM700 • Monofilament • *Direct Ship*

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FC700MM 12300	12'x300'	400.00	3/BNDL



Direct ship: Large rolls sizes are not in stock & will direct ship.

CONSTRUCTION ROLLS • NON-WOVEN

NW4 • Drainage & Filtration Non-Woven

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW4 125360	12.5'x360'	500.00	3/BNDL

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW4 15360	15'x360'	600.00	3/BNDL

NW4.5 • Drainage & Filtration Non-Woven

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW4.5 125360	12.5'x360'	500.00	3/BNDL

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW4.5 15360	15'x360'	600.00	3/BNDL

NW6 • Drainage & Filtration Non-Woven

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW6 125360	12.5'x360'	500.00	3/BNDL

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW6 15300	15'x300'	500.00	3/BNDL

NW7 • Heavy Duty Erosion Control Non-Woven

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW7 15300	15'x300'	500.00	3/BNDL

EC8 • Heavy Duty Erosion Control Non-Woven

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCEC8 125360	12.5'x360'	500.00	3/BNDL

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCEC8 15300	15'x300'	500.00	3/BNDL

NW10 • Drainage & Filtration Non-Woven • *Direct Ship*

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW10 125360	12.5'x360'	500.00	3/BNDL

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW10 15300	15'x300'	500.00	3/BNDL

NW12 • Heavy Duty Non-Woven • *Direct Ship*

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW12 125360	12.5'x360'	500.00	3/BNDL

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW12 15300	15'x300'	500.00	3/BNDL

NW16 • Heavy Duty Non-Woven • *Direct Ship*

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW16 125360	12.5'x360'	500.00	1
FCNW16 15150	15'x150'	250.00	1

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW16 15300	15'x300'	500.00	1

Direct ship: Large rolls sizes are not in stock & will direct ship.

GEOGRID

Stabilization is key in your retaining wall & road base projects. Our industry leading Geogrid has the stabilization you need & will increase the life span of your projects.




GEOGRID
FACT vs.



MYTH

RETAINING WALL • GEOGRID

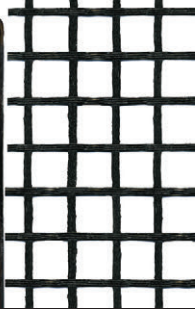

Features

- ▶ Adds strength & longevity to retaining walls & steep slopes
- ▶ Easy-to-handle roll sizes
- ▶ Helps prevent premature wall failure
- ▶ Adds strength & longevity to retaining walls
- ▶ Provides excellent stress transfer

Application

- ▶ Retaining Walls
- ▶ Steep Slopes

Universal • Bi-Directional • LTDS 688 • Walls up to 6'

PART #	SIZE	SQ YDS/ROLL	QUANTITY	PART #	SIZE	SQ YDS/ROLL	QUANTITY
GSRW U350	3' x 50'	16.67	10/CTN	GSRW U450	4' x 50'	22.22	10/CTN
GSRW U445	4' x 45'	20.00	20/CTN	GSRW U650	6' x 50'	33.33	40/PLT

3 Series • Bi-Directional • LTDS 1161 • Walls up to 10'

PART #	SIZE	SQ YDS/ROLL	QUANTITY	PART #	SIZE	SQ YDS/ROLL	QUANTITY
GSRW 3450	4' x 50'	22.22	9/CTN	GSRW 3615	6' x 150'	100.00	30/PLT
GSRW 365	6' x 50'	33.33	80/PLT	GSRW 31215	12' x 150'	200.00	3/BNDL

5 Series • Uni-Directional • LTDS 2064

PART #	SIZE	SQ YDS/ROLL	QUANTITY	PART #	SIZE	SQ YDS/ROLL	QUANTITY
GSRW 565	6' x 50'	33.33	35/PLT	GSRW 51215	12' x 150'	200.00	3/BNDL
GSRW 5615	6' x 150'	100.00	30/PLT				

7 Series • Uni-Directional • LTDS 2867

PART #	SIZE	SQ YDS/ROLL	QUANTITY	PART #	SIZE	SQ YDS/ROLL	QUANTITY
GSRW 7615	6' x 150'	100.00	20/PLT	GSRW 71215	12' x 150'	200.00	3/BNDL

8 Series • Uni-Directional • LTDS 3555 • Direct Ship

PART #	SIZE	SQ YDS/ROLL	QUANTITY	PART #	SIZE	SQ YDS/ROLL	QUANTITY
GSRW 8615*	6' x 150'	100.00	20/PLT	GSRW 81215	12' x 150'	200.00	3/BNDL

9 Series • Uni-Directional • LTDS 4329 • Direct Ship

PART #	SIZE	SQ YDS/ROLL	QUANTITY	PART #	SIZE	SQ YDS/ROLL	QUANTITY
GSRW 9615*	6' x 150'	100.00	20/PLT	GSRW 91215	12' x 150'	200.00	3/BNDL

10 Series • Uni-Directional • LTDS 5160 • Direct Ship

PART #	SIZE	SQ YDS/ROLL	QUANTITY	PART #	SIZE	SQ YDS/ROLL	QUANTITY
GSRW 10615*	6' x 150'	100.00	20/PLT	GSRW 101215	12' x 150'	200.00	3/BNDL

11 Series • Uni-Directional • LTDS 5906 • Direct Ship

PART #	SIZE	SQ YDS/ROLL	QUANTITY	PART #	SIZE	SQ YDS/ROLL	QUANTITY
GSRW 11615*	6' x 150'	100.00	20/PLT	GSRW 111215	12' x 150'	200.00	3/BNDL

*6' x 150' Uni-Directional Geogrid (8-11 Series) available by pallet qty only.
Direct ship: Large rolls sizes are not in stock & will direct ship.

GEOGRID



INSTALLING DIFFERENT GEOGRID TYPES


Bi-Directional (Universal & 3 Series)

Can be rolled out either *perpendicular or parallel* to the wall.


Uni-Directional (5-11 Series)

Must be rolled out *perpendicular* to the wall.

Follow the proper installation shown in green.
NEVER OVERLAP GEOGRID IN RETAINING WALLS!

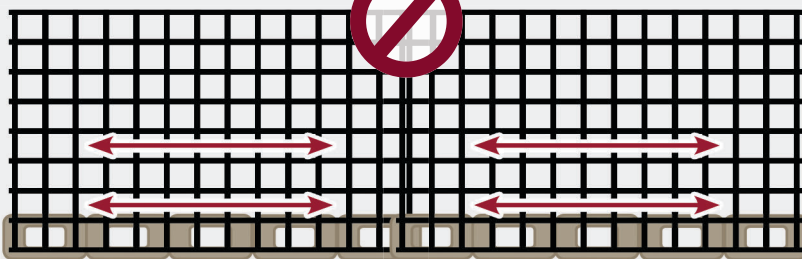


Example Parallel Installation (Bi-Directional)

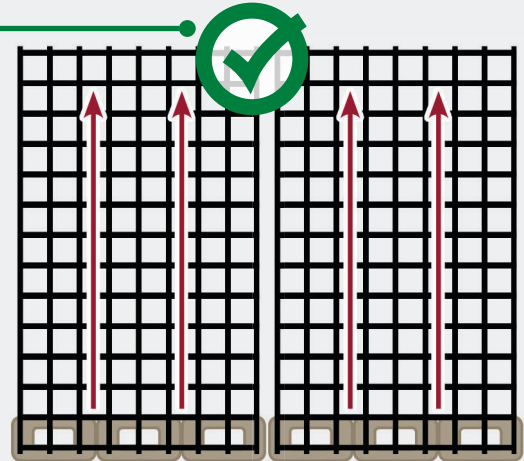

Example Perpendicular Installation (Bi-Directional & Uni-Directional)

ROAD BASE • GEOGRID

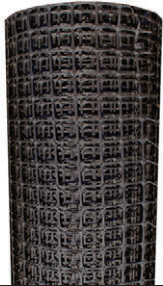

Features

- ▶ Provides excellent stress transfer on roadway projects
- ▶ Aids in even distribution of load weight & preventing shifting of base material to extend the life of the road
- ▶ Stabilizes road base
- ▶ Provides excellent stress transfer
- ▶ Prevents deterioration/shifting of base material
- ▶ Increases road life span

Application

- ▶ Sub-Grade Stabilization
- ▶ Soft Soils Under Embankments

Type 1 • Road Base Geogrid

PART #	SIZE	SQ YDS/ROLL	QUANTITY
GSRW TYPE1 129246	12.9' x246'	352.60	1

Type 2 • Road Base Geogrid

PART #	SIZE	SQ YDS/ROLL	QUANTITY
GSRW TYPE2 129164	12.9' x164'	235.07	1

3D Grid T • Road Base Geogrid

PART #	SIZE	SQ YDS/ROLL	QUANTITY
G3DGT 129246	12.9' x246'	352.60	1


3D Grid HT • Road Base Geogrid • Direct Ship

PART #	SIZE	SQ YDS/ROLL	QUANTITY
G3DHT 129246	12.9' x246'	352.60	1

3D Grid XL • Road Base Geogrid • Direct Ship

PART #	SIZE	SQ YDS/ROLL	QUANTITY
G3DXL 129164	12.9' x164'	235.07	1

Direct ship: Large rolls sizes are not in stock & will direct ship.

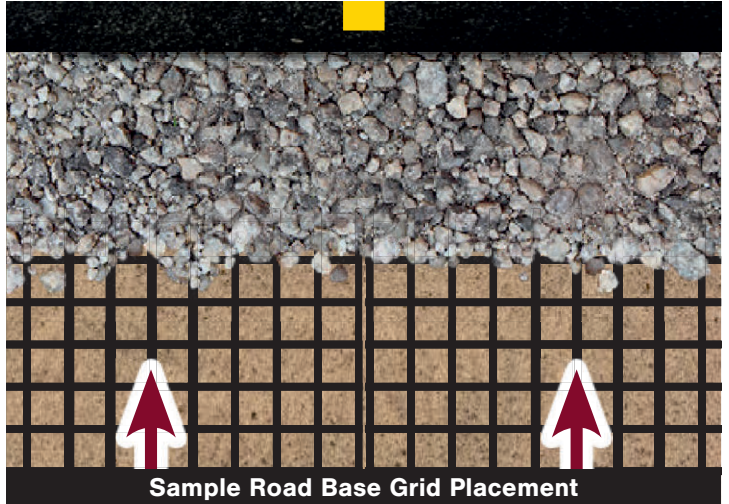

Sample Road Base Grid Placement

ADHESIVE

Use to adhere retaining wall caps. Use Rapid-Set Polyurethane adhesive for great results, even in freezing conditions!

Page 13



GEOGRID

Stabilize retaining walls, preventing wall failure & increasing life span.

Page 36



SS5

Use to separate the leveling pad materials from the sub-base which increases strength.

Page 30



WALL SYSTEMS & ENGINEERING

Our Hardscape Technical Services HTS gives you the advantage over your competition & by taking the guess work out of retaining wall estimates. Offering pro guides that provide information you need to get to a stamped engineered project. In addition, SRW carries all the supporting products for building a lasting, structural retaining wall like Geogrid, Geotextiles, Wall Drain, Adhesive & Sealers.

SLEEVE-IT®



SLEEVE-IT®
by STRATA

Features

- ▶ Integrates stable fence footings into the support structure of a segmental retaining wall (SRW)
- ▶ Maximizes land use
- ▶ Stackable & portable
- ▶ Easy to install
- ▶ Made with recycled material
- ▶ Code compliant: IBC 1015.2, IBC 1607.8.1, & ASCE 7 4.5.1.

Application

- ▶ Retaining Walls

Sleeve-It® SD1

PART #	SIZE	AMT PER CTN	QUANTITY
GSRW SLEEVIT SD1	15.3" x 30.6" x 23.4"	5/BNDL	9 BNDL/PLT

EARTHWORKS™



EARTHWORKS™
RETAINING WALL SYSTEM

Features

- ▶ Works on standard concrete block
- ▶ Creates a mechanical connection with geogrid
- ▶ A winning combo for strength & longevity
- ▶ Saves time & money
- ▶ Provides strength & longevity
- ▶ Easy to use & install
- ▶ Works on any size wall

Application


- ▶ Retaining Walls

Earthworks™

PART #	SIZE	QUANTITY
EAR8/EAR12	8" & 12"	250/CTN
EAR10/EAR12-8	10" & TRANSITION	250/CTN

PART #	SIZE	QUANTITY
EAR COR	CORNER SPACERS	100/CTN

WALL DRAIN PRO®

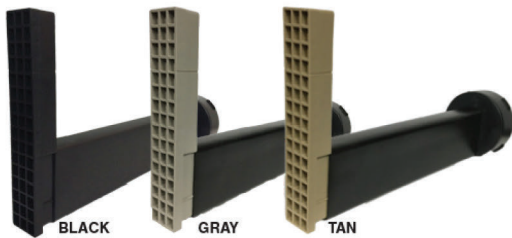

Features

- ▶ A simpler & more effective wall drain
- ▶ Visually pleasing design
- ▶ Improves water drainage
- ▶ Available in 3 colors
- ▶ No round cuts needed for cylindrical style drains

Application


- ▶ Retaining Walls

Wall Drain Pro®

PART #	SIZE	AMT PER CTN	QUANTITY
WDP-BLACK	1.375" x 14.25" x 7.75"	12/CTN	63 CTNS/PLT
WDP-TAN	1.375" x 14.25" x 7.75"	12/CTN	63 CTNS/PLT

PART #	SIZE	AMT PER CTN	QUANTITY
WDP-GRAY	1.375" x 14.25" x 7.75"	12/CTN	63 CTNS/PLT
WDP-46" NECK	46"	12/CTN	63 CTNS/PLT

AMERICAN WICK DRAIN

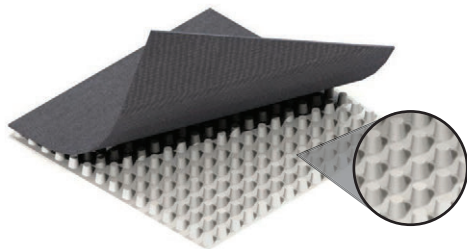

Features

- ▶ **Options available:** Contact SRW Territory Sales Representative to request a quote
- ▶ Reduce & redirect subsurface water
- ▶ Reduce subsurface hydrostatic pressure
- ▶ Moisture retention for green roofs
- ▶ Creates continuous flow path to designated drainage exits


Application

- ▶ Blindside Walls
- ▶ Foundation Walls
- ▶ Green Roof & Planters
- ▶ Retaining Walls

American Wick Drain • Direct Ship

Call for product offering & quote.

HTS PRO GUIDES

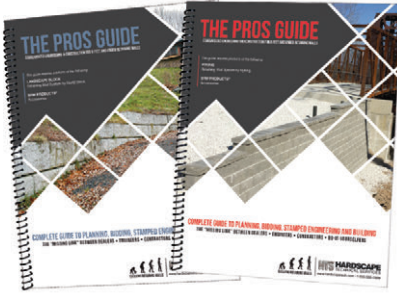

- ▶ The Pros Guide shows how to plan, estimate materials & build quality retaining walls 8 feet & under. This step-by-step guide makes it easy for you & your customers to achieve stamped engineering for under \$600.

RETAIL-READY HTS "THE PROS GUIDE"

BLOCK SYSTEM	PART #	QUANTITY
Allan Block® Retaining Wall Systems		
AB® Collection	HTS AB COLLECT RET	10 BOOKS/BOX
AB® Europa Collection	HTS AB EUROPA RET	10 BOOKS/BOX
Anchor™ Retaining Wall Systems		
Diamond	HTS DIA RET	10 BOOKS/BOX
Diamond Pro/Stone Cut	HTS DIPRO RET	10 BOOKS/BOX
Highland	HTS HIGH RET	10 BOOKS/BOX
Windsor	HTS WINDSOR RET	10 BOOKS/BOX
Borgert Products		
PanoMur®	HTS PANO RET	10 BOOKS/BOX
Cambridge Pavers		
Cambridge Sigma 6™	HTS CAMB SIGMA6 RET	10 BOOKS/BOX
Cambridge Sigma 8™	HTS CAMB SIGMA8 RET	10 BOOKS/BOX
CornerStone® Retaining Wall Systems		
CornerStone 100	HTS CS 100 RET	10 BOOKS/BOX
FrogStone	HTS FROG RET	10 BOOKS/BOX
MagnumStone	HTS MAGNU RET	10 BOOKS/BOX
StoneLedge	HTS STLED RET	10 BOOKS/BOX
Mirastone	HS MIRA RET	10 BOOKS/BOX
County Materials		
County Block™	HTS CNTY BLOCK RET	10 BOOKS/BOX
County Tribute™	HTS CNTY TRIBUTE RET	10 BOOKS/BOX
County Rib Rock	HTS CNTY RIBROCK RET	10 BOOKS/BOX
County Integrity™	HTS CNTY INTEGRITY RET	10 BOOKS/BOX
Dagistino Products		
Dagblock	HTS DAGBLOCK RET	10 BOOKS/BOX
Earthworks™		
8"	HTS EAR8 RET	10 BOOKS/BOX
12"	HTS EAR12 RET	10 BOOKS/BOX

BLOCK SYSTEM	PART #	QUANTITY
ICD® Retaining Wall Systems		
Stonewall Select	HTS ICD STNEWLL RET	10 BOOKS/BOX
Keystone® Retaining Wall Systems		
Compac	HTS KS COMPAC RET	10 BOOKS/BOX
Country Manor	HTS KS CT MANOR RET	10 BOOKS/BOX
Verazzo	HTS KS VERAZZO RET	10 BOOKS/BOX
Lehi Block Incorporated		
ArtStone	HTS ARTSTONE RET	10 BOOKS/BOX
Pyzique® Retaining Wall Systems Block Incorporated		
Maytrix	HTS MAYTRX RET	10 BOOKS/BOX
RisiStone Inc. Retaining Wall Systems		
Pisa2®/RomanPisa®	HTS PISA RET	10 BOOKS/BOX
Techo-Block		
Mini-Creta	HTS MINI-CRETA RET	10 BOOKS/BOX
Monumental	HTS MONUMENTAL RET	10 BOOKS/BOX
Versa-Lok® Retaining Wall Systems		
Standard	HTS VLSTD RET	10 BOOKS/BOX
Mosaic	HTS MOSAIC RET	10 BOOKS/BOX
Square Foot	HTS VLSQFT RET	10 BOOKS/BOX
Vyking® Retaining Wall Systems		
Vyking	HTS VYK RET	10 BOOKS/BOX
WestBlock® Retaining Wall Systems		
Pisa2®/RomanPisa®	HTS PISA RET	10 BOOKS/BOX
World Block™ Retaining Wall Systems		
Knob-Style	HTS WBKNOB RET	10 BOOKS/BOX
Landscape	HTS WBLANDSCAPE RET	10 BOOKS/BOX
Mid-Sized	HTS WB MID RET	10 BOOKS/BOX
V-Interlock	HTS WBVINTERLOCK RET	10 BOOKS/BOX

WALL SYSTEMS & ENGINEERING

3. Multiply the average height (H) above by the total length of the wall section to determine the number of square feet of wall facing.

4. If the wall section steps or has a top or bottom of wall, add 1/2 course of blocks. On the top, divide the length of the wall section by 3. Round the result by 0.667. Then add that result to the square feet of wall facing.

5. Divide the total square feet of wall facing by the square feet of one block to determine the number of blocks required.

6. Round the result up to the next whole number to determine the number of blocks to order.

7. Divide the total length of the wall section by 1.5 to determine the number of cubic yards of aggregate and concrete to order.

8. Multiply the total length of the wall section by 1.5 to determine the number of cubic yards of concrete to order.

1. Check the top of the first course of wall to be sure it is level and square. If not, adjust the top of the first course of wall to be level and square.

2. Place the first course of wall on the ground. The first course of wall should be level and square. If not, adjust the top of the first course of wall to be level and square.

3. Place the second course of wall on top of the first course. The second course of wall should be level and square. If not, adjust the top of the second course of wall to be level and square.


4. Place the third course of wall on top of the second course. The third course of wall should be level and square. If not, adjust the top of the third course of wall to be level and square.

5. Place the fourth course of wall on top of the third course. The fourth course of wall should be level and square. If not, adjust the top of the fourth course of wall to be level and square.

PLANNING DESIGN TABLES INSTALLATION

Stamped engineering is available for the retaining wall blocks featured in The Pros Guide. Refer to the Pros Guide for more information on walls that will qualify for Stamped Engineering with HTS. *May apply to walls that are 8 feet and under.

WE CREATE PRELIMINARY DESIGNS FOR HUNDREDS OF DIFFERENT BLOCKS.

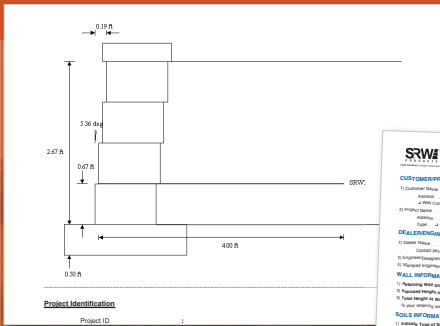


Preliminary Design

Free Preliminary Designs Include:

- ▶ Exposed/total height designs
- ▶ Installation guidelines
- ▶ Material estimates

Preliminary Design Form

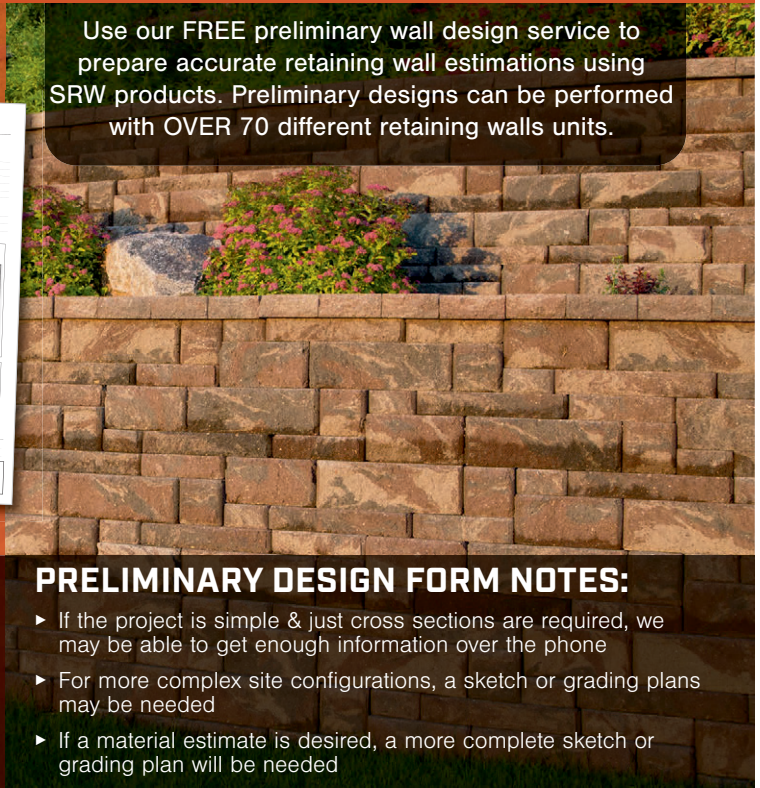

Use our FREE preliminary wall design service to prepare accurate retaining wall estimations using SRW products. Preliminary designs can be performed with OVER 70 different retaining walls units.

GET STARTED TODAY!

1. Download a form from our website:
2. Email completed form to CustomerService@SRWProducts.com



PRELIMINARY DESIGN FORM NOTES:

- ▶ If the project is simple & just cross sections are required, we may be able to get enough information over the phone
- ▶ For more complex site configurations, a sketch or grading plans may be needed
- ▶ If a material estimate is desired, a more complete sketch or grading plan will be needed

We can create preliminary designs for hundreds of different blocks.

Stamped Wall Engineering for under \$600 & in as little as 7 days!

Building codes often require a building permit & structural wall design prepared by a qualified engineer for retaining walls as short as 2' in exposed height. Requirements will vary but Hardscape Technical Solutions makes this process quick & easy!

Design Table Stamped by Engineer



Letter Stamped by Engineer

What You Get

What You Do

- ▶ Obtain soil sample or soil report, site photos & wall sketches
- ▶ Download an HTS request form from at SRWProducts.com
- ▶ Send Request Form with samples, photos & sketches to us

What We Do

- ▶ Review your request
- ▶ Send your wall project to an HTS certified engineer

- ▶ The Pros Guide: step-by-step instructions for the specific retaining wall unit
- ▶ Stamped table page & letter from engineer
- ▶ Geogrid & fabric samples



BASE REPLACEMENT

Looking to reduce time, labor, excavation, & raw material costs on your next project?
SRW base replacement options are here to help.

HEXABASE™ • INTERLOCKING BASE REPLACEMENT



Features

- ▶ Save up to 50%* on excavation costs
- ▶ Save up to 75%* on fill material costs
- ▶ 100% permeable: will not trap moisture like similar foam-based products
- ▶ Interlocking brown panels connect to make a custom-sized base
- ▶ Follows & conforms to standard guidelines for paver installations
- ▶ Single panel measures: 19.75" x 19.75" x 1.8"
- ▶ 100% permeable: will not trap moisture like similar foam-based products
- ▶ Designed to be used with traditional edging & spikes
- ▶ Resistant to flexing during freeze/thaw cycles

Application

- ▶ Standard Paver Installations
- ▶ Patios & Walkways
- ▶ Grass Pavers

HexaBase™ • Interlocking Base Replacement

PART #	AMT PER CTN	TOTAL SQ FT	QUANTITY	PART #	AMT PER CTN	TOTAL SQ FT	QUANTITY
GSRW HB CTN	6/CTN	16.15	16 CTNS/PLT	GSRW HB BULK**	1	452.20	168 PCS/PLT

*Approximate, base reduction will vary depending on location/area & soil quality. **Bulk HexaBase™ available by pallet qty only.

ULTRA DRIVE 3D™ • THREE-DIMENSIONAL DRIVEWAY GRID



Features

- ▶ Follows & conforms to standard guidelines for paver installation process
- ▶ Reduces base excavation & fill up to 50%* in poor base soil
- ▶ 100% non-biodegradable
- ▶ Significantly reduce the effects of freeze/thaw cycles on paver driveways
- ▶ Installs easily, no special procedures needed
- ▶ Strongest driveway grid in the market



Application

- ▶ Paver Driveways
- ▶ Concrete Driveways
- ▶ Hybrid Installations
- ▶ Asphalt Driveways

Ultra Drive 3D™ • Three-Dimensional Driveway Grid

PART #	SIZE	TOTAL SQ FT	QUANTITY	PART #	SIZE	TOTAL SQ FT	QUANTITY
GSRW UD3D 65150	6.5' X150'	108.33	12/PLT	GSRW UD3D 125150	12.5' X150'	208.33	1

*Approximate, base reduction will vary depending on location/area & soil quality.

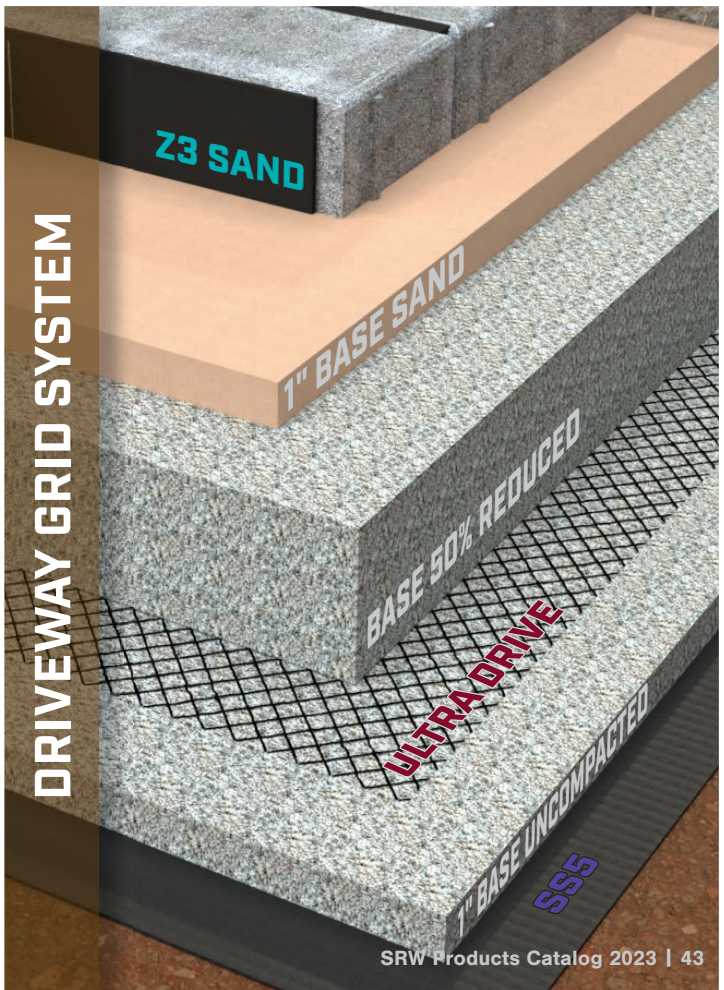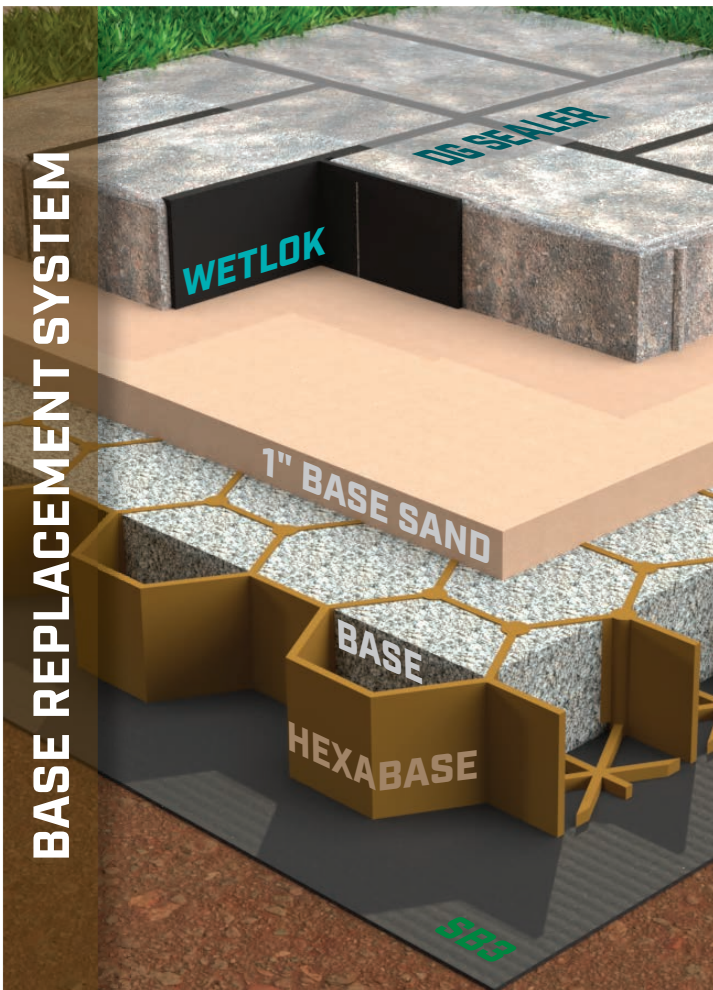

EROSION CONTROL & IRRIGATION

We've got you covered when it comes to Erosion Control & Irrigation. Our all-inclusive assortment of products fit all your needs for soil erosion, silt socks, drainage, blankets, turf reinforcement mats, wattles, storm drain protection, rock logs, & they are environmentally friendly.

STRAW BLANKET

Weed free straw blankets are woven from a material for erosion control up to one year. Serves as a mulching layer.

Page 49



SILT FENCE & STAKES



Features

- ▶ SRW Silt Fence is a woven fabric that temporarily controls sediment on construction sites.
- ▶ Meets most DOT specs
- ▶ Stakes are pointed for easy install
- ▶ Protects water quality in nearby streams, rivers & lakes from sediment in storm water runoff
- ▶ Silt Fence comes with pre-attached posts

Silt Fence • Black • 70g • 1.25" x 1.25" x 42" Stakes

PART #	SIZE	STAKES/ROLL	QUANTITY
FCMF S03100	3' x 100'	13 STAKES	48/PLT
FCMF S0310026	3' x 100'	26 STAKES	20/PLT

PART #	SIZE	STAKES/ROLL	QUANTITY
FCMF S031500	3' x 1500'	FABRIC ONLY	9/PLT

Silt Fence • Orange • 70g • 1.25" x 1.25" x 42" Stakes

PART #	SIZE	STAKES/ROLL	QUANTITY
FCMFO S03100	3' x 100'	13 STAKES	48/PLT

PART #	SIZE	STAKES/ROLL	QUANTITY
FCMFO S031500	3' x 1500'	FABRIC ONLY	9/PLT

Silt Fence Stakes • *Must be purchased in pallet quantities*

PART #	SIZE	STAKES/ROLL	QUANTITY
FCMF STAKE 42 1 1/4	42" x 1.25"	STAKES ONLY	840/PLT

PART #	SIZE	STAKES/ROLL	QUANTITY
FCMF STAKE 48	48" x 1.5"	STAKES ONLY	25/BNDL-650/PLT

DRAINFIELD



Features

- ▶ Polyester geotextiles are commercial-grade drainage fabrics.
- ▶ High puncture resistance
- ▶ Provide high water flow rates
- ▶ Excellent filtration

DF1.5 • Spunbond

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FD1.5 03300	3' x 300'	100.00	42/PLT
FD1.5 04300	4' x 300'	133.33	42/PLT
FD1.5 05300	5' x 300'	166.67	36/PLT

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FD1.5 06300	6' x 300'	200.00	36/PLT
FD1.5 12300	12' x 300'	400.00	4/BNDL

DF2 • Spunbond

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FD2 03300	3' x 300'	100.00	42/PLT
FD2 04300	4' x 300'	133.33	42/PLT

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FD2 06300	6' x 300'	200.00	36/PLT
FD2 12300	12' x 300'	400.00	4/BNDL

JUTE MESH



Features

- ▶ Recommended slope is 3:1
- ▶ Great for environmentally sensitive erosion control applications
- ▶ Biodegradable blanket woven from spun jute yarns
- ▶ Typically provides 6 - 9 months of erosion control
- ▶ Wide openings between yarns help keep wildlife safe, open area is 70 - 75%

Jute Mesh

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCMB JUTE15 48225	4' x 225'	100.00	12/PLT



Features

- ▶ Soil erosion during construction can find its way to the city's water system through storm sewers, grates & inlets. Because of the potential danger to our environment & sewer systems, the government has required contractors to use a professional-grade inlet filter & to erect their own sediment control solutions & measures when starting any new project. SRW partners with Dandy Products to ensure your small or large projects are protected.
- ▶ Unique patented designs
- ▶ Easy-to-see bright orange solutions
- ▶ Easy to install, maintain, inspect & reuse

Contact SRW Customer Service for custom sizes or overflow ports!



Dandy Curb Sack®					
PART #	SIZE	QUANTITY	PART #	SIZE	QUANTITY
DCS 24 24	24"x24"	5/CTN	DCS 36 24	36"x24"	5/CTN
DCS 30 12	30"x12"	5/CTN			

Dandy Curb Bag®		
PART #	SIZE	QUANTITY
DCB 36 24	36"x24"	5/CTN

Dandy Sack®					
PART #	SIZE	QUANTITY	PART #	SIZE	QUANTITY
DS 24 24	24"x24"	5/CTN	DS 30 30	30"x30"	5/CTN
DS 36 24	36"x24"	5/CTN	DS 36 36	36"x36"	5/CTN
DS 48 24	48"x24"	5/CTN			

Dandy Bag®					
PART #	SIZE	QUANTITY	PART #	SIZE	QUANTITY
DB 36 36	36"x36"	5/CTN	DB 24 24	24"x24"	5/CTN
DB RD 24	24" ROUND	5/CTN	DB 36 24	36"x24"	5/CTN

Dandy Dewatering Bag®					
PART #	SIZE	QUANTITY	PART #	SIZE	QUANTITY
DDB 10 10	10'x10'	1	DDB 6 6	6'x6'	1
DDB 15 15	15'x15'	1			

Find installation instructions at SRWProducts.com

ROCK LOG



Features

- ▶ A woven monofilament tube sock filled with rock or aggregate to minimize runoff on hard surfaces or landscape areas.
- ▶ First & last line of defense for filtration in roadways
- ▶ Designed to be filled on site

Rock Log		
PART #	SIZE	QUANTITY
FCMBR 7"4'	7"x4'	5/CTN

SILT SOCK



Features

- ▶ Environmentally friendly erosion control for wetlands, waterways & general areas under construction.
- ▶ Filters 90% of sediment from runoff
- ▶ Easy install, reusable
- ▶ No equipment needed to install

Silt Sock

PART #	SIZE	QUANTITY
FCMSS 0820 BLK	8"X20'	8/PLT

STRAW WATTLES



Features

- ▶ Use these weed-free wattles over bare soil or in conjunction with erosion control blankets, on steep slopes, around drains for inlet protection or as perimeter control for job sites.
- ▶ Helps stabilize slopes by slowing, spreading & filtering overland water flow
- ▶ Flexible & conforms to the surface

Straw Wattles*

PART #	SIZE	QUANTITY	PART #	SIZE	QUANTITY
FCMWS 0925	9"X25'	12/PLT	FCMWS 1220	12"X20'	8/PLT

*Pallet quantities may vary

TREE WATERING BAGS



Features

- ▶ Protect your tree investments & optimize growth with slow release Tree Watering Bags.
- ▶ Ideal for tree trunks up to 4" in diameter or chain multiple bags together for larger trunks.
- ▶ Holds up to 20 gallons
- ▶ 5 - 8 hour water release
- ▶ Commercial grade material
- ▶ No tools required for installation
- ▶ Easy to install
- ▶ Save time & money

Tree Watering Bags

PART #	SIZE	AMT PER CTN	QUANTITY
TREE BAG 20G CTN 36	20 GAL	36/CTN	35/PLT

TREE WATERING RINGS



Features

- ▶ Protect your tree investments & optimize growth with slow release Tree Watering Rings.
- ▶ Holds up to 15 gallons
- ▶ Ideal for tree trunks up to 6" in diameter.
- ▶ 5 - 8 hour drip time
- ▶ Two valves for even distribution
- ▶ Reduces transplant shock & drought stress

Tree Watering Rings

PART #	SIZE	AMT PER CTN	QUANTITY
TREE RING 15G CTN 24	15 GAL	24/CTN	42/PLT

STRAW BLANKETS



Features

- ▶ Single or double sided-options.
- ▶ Weed-free straw
- ▶ Erosion control up to one year
- ▶ Serves as a mulching layer

Straw Blankets • Single Sided*


PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCMB STSINGLE 4	4' X 50'	22.22	40/PLT
FCMB STSINGLE 4 CTN	4' X 50'	22.22	9/CTN (4CTN/PLT)

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCMB STSINGLE	8' X 112.5'	100.00	25/PLT

Straw Blankets • Double Sided*

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCMB STDDOUBLE	8' X 112.5'	100.00	25/PLT

COCONUT BLANKETS

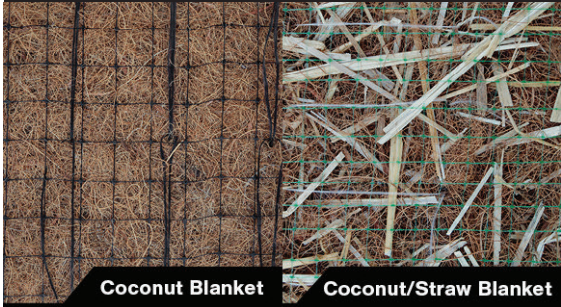

Features

- ▶ 100% coconut, or straw & coconut mix options.
- ▶ Erosion control up to three years
- ▶ Serves as a mulching layer

CS-3 • Coconut/Straw Blankets • Double Sided*

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCMB CS81125	8' X 112.5'	100.00	30/PLT

CC-4 • Coconut Blankets • 100% Coconut*

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCMB CO81125	8' X 112.5'	100.00	30/PLT

TURF REINFORCEMENT MAT



Features

- ▶ Provide excellent protection for seeds & newly sprouted grasses or plants
- ▶ Turf reinforcement for more severe slope applications
- ▶ Erosion control greater than three years.

PP5-10 • Turf Reinforcement Mat*

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCMB TRM 81125	8' X 112.5'	100.00	25/PLT

*Pallet quantities may vary

Blanket Accessories

Along with our industry leading fabric & blankets, we also have all the necessary accessories to go with it. We've got you covered with Staples & Staple Setters.

STAPLES

pg 58



STAPLE SETTER



pg 59



DIAMOND BLADES

No matter what you're cutting, get the fastest, smoothest cut with SRW diamond blades. Our blades are designed to cut just about anything, including porcelain, natural stone, & extremely abrasive materials.

DIAMOND BLADE SEGMENT STYLE GUIDE



Segments with Key-Hole Slots

1 Key-hole slots are a feature on segmented style blades. They help to reduce core temps by circulating air around segments. Different widths of key-hole slots are used to control heat in different applications. Segmented blades are the industry standard for blades designed to cut a wide variety of materials.

Alt. Drop Segments with U-Hole Slots

2 Special alternating segments with taller profiles to protect against undercut while cutting asphalt & other abrasive materials. This premium feature is typically combined with wider u-slots to help lower blade temperatures, further extending the blade life.

Alt. Turbo Segments with Key-Hole Slots

3 This serrated edge is designed to give the blade faster cutting speeds while maintaining a smooth cut. This feature generally allows premium blades to cut slightly harder materials with longer blade life. Key-hole slots are also added to control core temperatures.

Angled Alt. Turbo Segments with Angled Key-Hole Slots

4 A feature of SRW All Purpose Blades, this style of alternating turbo segment clears debris & slurry from the cut faster, making the blade suitable for a wider range of materials. Angled key-hole slots compliment the turbo segments by further reducing segment temperatures to reduce the risk of glazing.

Alt. Turbo Segments with Angled U-slots

5 Combining alternating turbo segments with wide angled u-slots helps the blade handle a wider range of materials without overheating the segments or core. This combination helps to ensure best blade lifespan.

Segmented Turbo Rim

6 Designed for hard materials, every segment of this style blade is a turbo segment. This allows the blade to use softer bonds for faster cutting, while keeping core heat lower to resist distortion.

Turbo Crown

7 This saw tooth segment is designed to provide high speed cutting through faster debris removal, cooler blade temps, & the taller turbo crown segments offering a long lasting professional finish with smoother cuts.

Continuous Turbo Rim

8 Continuous turbo rim allows for higher RPM's without overheating the blade core & "glazing" the diamonds. For safety, MAX RPM ratings should be strictly followed.

SURFACE APPLICATION

NATURAL STONE

CONCRETE PAVERS

CLAY PAVERS

WETCAST

MANUFACTURED STONE

BLOCK RETAINING WALLS

HIGH PSI CONCRETE (5000 OR HIGHER)

REBAR REINFORCED CONCRETE

WIRE MESH REINFORCED CONCRETE

GREEN CONCRETE (12 HRS OR LESS)

GREEN CONCRETE (20 HRS OR MORE)

CURED CONCRETE

ASPHALT

PORCELAIN

BLADES	GENERAL PURPOSE	NATURAL STONE	CONCRETE PAVERS	CLAY PAVERS	WETCAST	MANUFACTURED STONE	BLOCK RETAINING WALLS	HIGH PSI CONCRETE (5000 OR HIGHER)	REBAR REINFORCED CONCRETE	WIRE MESH REINFORCED CONCRETE	GREEN CONCRETE (12 HRS OR LESS)	GREEN CONCRETE (20 HRS OR MORE)	CURED CONCRETE	ASPHALT	PORCELAIN
GENERAL PURPOSE	■	■	■	■	■	■	■			■		■	■		
ALL PURPOSE	■	■	■	■	■	■	■		■	■		■	■	■	
ABRASIVE MATERIAL											■			■	
HARD MATERIAL	■	■	■	■	■			■	■	■			■		■

GENERAL PURPOSE BLADES



Features

- ▶ Specifically engineered for use with a variety of general purpose cutting conditions
- ▶ Standard & premium options available

Application

- ▶ Brick/Clay
- ▶ Cured Concrete
- ▶ Sandstone
- ▶ Limestone
- ▶ Travertine
- ▶ Retaining Wall Block
- ▶ Concrete Block
- ▶ Reinforced Concrete with Wire Mesh

General Purpose Diamond Blades (Blue)

PART #	SIZE	THICKNESS/SEG HEIGHT	ARBOR	STYLE	SLOT STYLE	SEGMENT STYLE GUIDE NUMBER	COOLING HOLES	GRADE	
BTP 4	4"	.250"/10 MM	7/8"-5/8"	SEG	KEY-HOLE	1	NO	STANDARD	
BU04.5	4.5"	.080"/8 MM	7/8"-5/8"	CONT. TURBO RIM	NONE	8	YES	STANDARD	
BU045 SEGMENT	4.5"	.060"/8 MM	7/8"-5/8"	SEG	KEY-HOLE	1	NO	STANDARD	
BU07	7"	.095"/10 MM	UNIVERSAL	CONT. TURBO RIM	NONE	8	YES	STANDARD	
BU070 SEGMENT	7"	.080"/8 MM	UNIVERSAL	SEG	KEY-HOLE	1	NO	STANDARD	
BU09	9"	.090"/10 MM	5/8"-7/8"	TURBO SEG	KEY-HOLE	6	NO	STANDARD	
BGPC09	9"	.090"/10 MM	5/8"-7/8"	SEG	KEY-HOLE	1	NO	PREMIUM	
BU10	10"	.095"/10 MM	UNIVERSAL	SEG	KEY-HOLE	1	NO	STANDARD	
BGPC10	10"	.095"/10 MM	7/8"-5/8"	SEG	KEY-HOLE	1	NO	PREMIUM	
BU12	12"	.125"/10 MM	1"/20 MM	SEG	KEY-HOLE	1	NO	STANDARD	
BGPC12	12"	.125"/12 MM	1"/20 MM	SEG	KEY-HOLE	1	NO	PREMIUM	
BU14	14"	.125"/10 MM	1"/20 MM	SEG	KEY-HOLE	1	NO	STANDARD	
BGPC14	14"	.125"/12 MM	1"/20 MM	SEG	WIDE KEY-HOLE	1	NO	PREMIUM	
BGPZ14	14"	.125"/15 MM	1"/20 MM	ALT TURBO SEG	KEY-HOLE	3	YES	PREMIUM	
BGPX14	14"	.125"/15 MM	1"/20 MM	TURBO/CROWN	NARROW U-SLOT	7	YES	PREMIUM	TOP PERFORMING BLADE!

ALL PURPOSE BLADES



Features

- ▶ Designed to cut a variety of materials from concrete & asphalt to stone
- ▶ Can be used on a wide variety of materials
- ▶ Standard & premium options available

Application

- ▶ Brick/Clay
- ▶ Asphalt
- ▶ Sandstone
- ▶ Limestone
- ▶ Travertine
- ▶ Retaining Wall Block
- ▶ Concrete Block
- ▶ Reinforced Concrete with Wire Mesh/Rebar
- ▶ Green/Cured Concrete

All Purpose Diamond Blades (Red)

PART #	SIZE	THICKNESS/SEG HEIGHT	ARBOR	STYLE	SLOT STYLE	SEGMENT STYLE GUIDE NUMBER	COOLING HOLES	GRADE	
BVAP14	14"	.125"/13 MM	1"/20 MM	ALT TURBO SEG	ANGLED U-SLOT	5	YES	STANDARD	
BPAP14	14"	.125"/13 MM	1"/20 MM	ANGLED ALT TURBO SEG	ANGLED KEY-HOLE	4	YES	PREMIUM	

ABRASIVE MATERIAL BLADES



Features

- ▶ Designed for cutting abrasive materials that wear away most blades quickly
- ▶ Premium blade for long-term reliability
- ▶ For use on even the most abrasive materials

Application

- ▶ Asphalt
- ▶ Green Concrete (12 hours or less)

Abrasive Material Diamond Blades (Green)

PART #	SIZE	THICKNESS/SEG HEIGHT	ARBOR	STYLE	SLOT STYLE	SEGMENT STYLE GUIDE NUMBER	COOLING HOLES	GRADE
BAMA14	14"	.125"/10 MM	1"/20 MM	ALT DROP SEG	U-SLOT	2	NO	PREMIUM

HARD MATERIAL BLADES



Features

- ▶ Designed to provide fast cutting with minimal spalling
- ▶ Standard & premium options available
- ▶ Specifically engineered for use with a variety of general purpose cutting conditions

Application


- ▶ Cured Concrete
- ▶ Granite
- ▶ Bluestone
- ▶ Wetcast
- ▶ Pavers
- ▶ Natural Stone
- ▶ Reinforced Concrete with Wire Mesh/Rebar
- ▶ Porcelain*

Hard Material Diamond Blades (Yellow)

PART #	SIZE	THICKNESS/SEG HEIGHT	ARBOR	STYLE	SLOT STYLE	SEGMENT STYLE GUIDE NUMBER	COOLING HOLES	GRADE
BPPB4.5	4.5"	.050"/10 MM	7/8"-5/8"	CONT TURBO RIM	NONE	8	YES	PREMIUM
BPPC12	12"	.125"/12 MM	1"/20 MM	SEG TURBO	KEY-HOLE	6	YES	STANDARD
BPPB14	14"	.087"/10 MM	1"	CONT TURBO RIM	NONE	8	YES	PREMIUM
BPPC14	14"	.125"/12 MM	1"/20 MM	SEG TURBO	KEY-HOLE	6	NO	STANDARD
BUSA HM14	14"	.125"/12 MM	1"/20 MM	ALT TURBO SEG	KEY-HOLE	3	NO	PREMIUM

*BPPB blades are the only hard material blades designed to cut porcelain.

TURBO CUP WHEEL

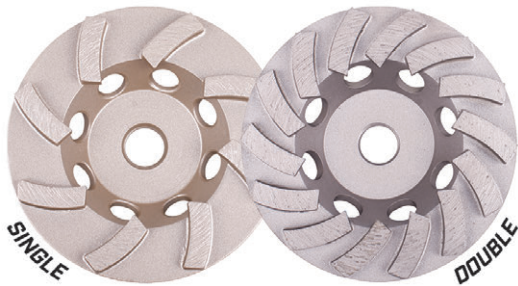

Features

Single Turbo Cup Wheel:

- ▶ Single turbo style for increased grinding speed. Ideal for removing material in high spots.

Double Turbo Cup Wheel:

- ▶ Double turbo style for faster/more aggressive grinding & added diamonds/segments for longer life.

Single Turbo Cup Wheel

PART #	SIZE	ARBOR	STYLE	GRADE
BCW 4.5 ST	4.5"	5/8"-11 THREADED	SINGLE TURBO	STANDARD

Double Turbo Cup Wheel

PART #	SIZE	ARBOR	STYLE	GRADE
BCW 4.5 DT	4.5"	5/8"-11 THREADED	DOUBLE TURBO	STANDARD

DON'T SEE WHAT YOU NEED? SIMPLY ASK.

We're here to help! Call us at 800.752.9326

ACCESSORIES

All the little things that make hardscapes & landscape projects MORE efficient, making SRW Products a true one stop shop for all of our hardscape accessory needs.

MULCH STABILIZER

Keep your mulch looking amazing all season long with this must-have landscaping product. It can even be used on sand & dirt in decorative areas to control dusting.

Page 57



HEAVY-DUTY CONSTRUCTION SPRAYER



Features

- ▶ Use with SRW Sealers
- ▶ Galvanized steel
- ▶ Can handle up to 35% solids
- ▶ Ideal for commercial applications

Application

- ▶ Works well with all SRW sealers.

Heavy-Duty Construction Sprayer

PART #	SIZE	QUANTITY
SSSP SPRAYER GALV	3.5 GAL	1/BOX

SLIT FOAM ROLLERS



Features

- ▶ Applies SRW sealers evenly
- ▶ Works great on textured surfaces
- ▶ Remains spongy & will not compress

Application

- ▶ **SRW Slit Foam Roller:** Designed for use with any SRW water based sealer.
- ▶ **SRW Slit Foam Roller X-treme:** Designed for use with solvent-based products. Also works well with all SRW sealers.

SRW Slit Foam Roller

PART #	SIZE	QUANTITY
SSSFR CTN	13/16" ROLLER	12/CTN

SRW Slit Foam Roller X-treme

PART #	SIZE	QUANTITY
SSSFR XTR CTN	1/2" ROLLER	12/CTN

SR SLIP-RESIST™



Features

- ▶ Add this polypropylene particle mixture to a SRW sealer to create a textured surface
- ▶ Improves slip resistance
- ▶ Adds invisible grip
- ▶ Can be used with all SRW Products film-forming sealers
- ▶ 1:1 ratio; 1pouch per 1gal

Application

- ▶ **Specialty Seal™:** 2PX, PRX
- ▶ **Premium Seal™:** LGX, LGX VOC, HGX, HGX VOC, DG, DG VOC
- ▶ **Paver Seal™:** LG, HG

SR Slip-Resist™

PART #	SIZE	QUANTITY
SSSR PG	3.2 OZ BAG	12/CTN

PATH STABILIZER™



Features

- ▶ Covers up to 75 sq. ft. per 5 gallons
- ▶ One easy-to-use formula ideal for both commercial & residential applications
- ▶ Liquid bonding agent that controls dust
- ▶ Stabilizes pathways & patios
- ▶ Minimizes tracking & weed growth

Application

- ▶ Decomposed Granite
- ▶ Crushed Stone 3/8"–1/4" minus
- ▶ Pathways & Patio Areas

Path Stabilizer™

PART #	SIZE	AMT PER CTN	QUANTITY
TAC PATH 5GAL	5 GAL	1	36/PLT

MULCH STABILIZER™



Features

- ▶ Covers up to 200 sq. ft. per gallon
- ▶ Locks mulch in place
- ▶ Easy to use
- ▶ Enhances color & prevents fading
- ▶ Dries clear
- ▶ Flexible bond
- ▶ Helps prevent weed growth

Application

- ▶ Colored & Natural Mulch
- ▶ Pine Straw
- ▶ Synthetic Mulch
- ▶ Sand & Dirt

Mulch Stabilizer™

PART #	SIZE	AMT PER CTN	QUANTITY	PART #	SIZE	AMT PER CTN	QUANTITY
TAC MULCH CTN	1 GAL	4/CTN	36 CTNS/PLT	TAC MULCH 5GAL	5 GAL	1	36/PLT



MULCH STABILIZER

Not only prevents your mulch from moving around during weather events or wind, but it also provides a protective barrier that will help reduce the washout of pigmented fibers.

SF-8™ DISPENSER GUN

NEW!



Features

- ▶ Stainless steel rod
- ▶ Steel extension
- ▶ Fully adjustable dial
- ▶ Turn adjustable dial clockwise to prevent release during transport or in storage
- ▶ Rod gasket lifetime (wear): >100,000 cycles
- ▶ **See adhesive on pg 13**

SF-8™ Dispenser Gun

PART #	QUANTITY
SF8G	1/BOX

SF-8™ CLEANER

NEW!



Features

- ▶ Twists on the SF-8™ Dispenser for easy cleaning
- ▶ Includes spray nozzle for spot cleaning on the job site
- ▶ 16 oz can for extended use
- ▶ **See adhesive on pg 13**

SF-8™ Cleaner

PART #	SIZE	AMT PER CTN	QUANTITY
CSF8	16 OZ	12/CTN	84 CTNS/PLT



DON'T FORGET, WHEN PURCHASING SF-8 ADHESIVE & DISPENSER GUN TO INCLUDE A CAN OF CLEANER.

Not only can the SF-8 cleaner be used to maintain the quality of the gun, it comes with an easy to use attached nozzle for quick jobsite cleanups.


SPIKES, STAKES, STAPLES & PINS

Features


- ▶ Many sizes & finishes with convenient packaging options

Application

- ▶ **Spikes:** Paver Rail™ & timber
- ▶ **Staples & Pins:** fabric, geogrid, erosion control product installation, irrigation, & newly laid sod

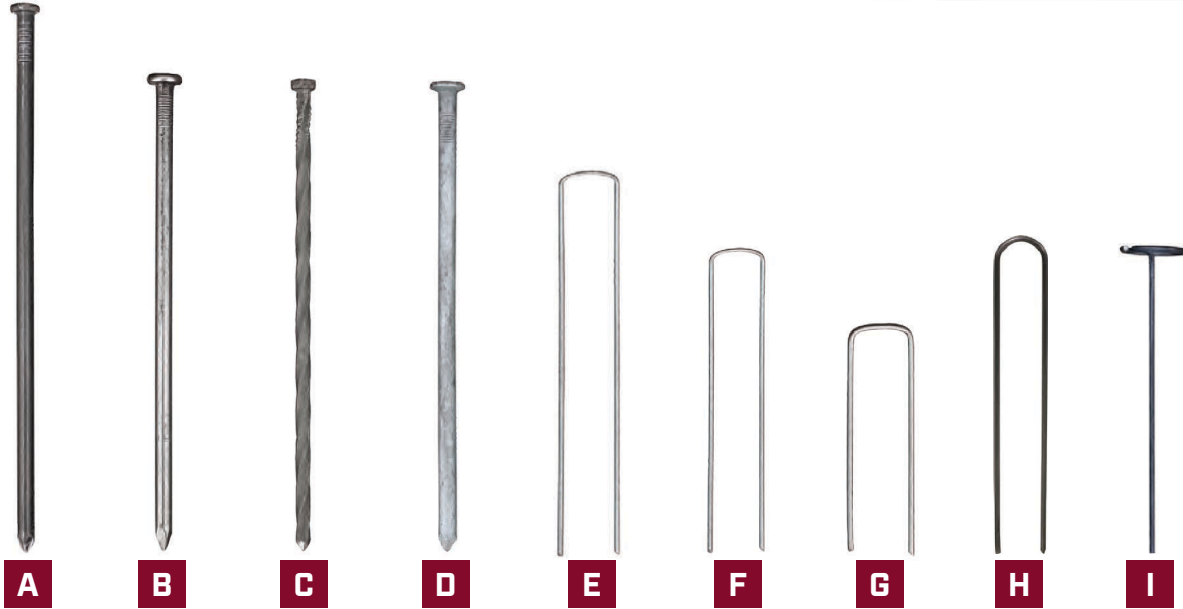

Reference these diagrams for the correct staple placement upon installation of our straw blankets!

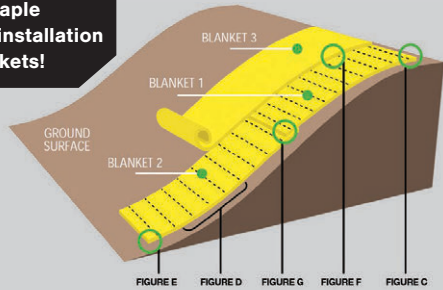

Spikes • Bulk Carton

	PART #	SIZE	AMT PER CTN	QUANTITY
A	FCMST 12-50#	12" SMOOTH	50 LBS/CTN	48 CTNS/PLT
B	FCMST 10-50#	10" SMOOTH	50 LBS/CTN	48 CTNS/PLT
C	FCMST 10-50#SS	10" SPIRAL	50 LBS/CTN	48 CTNS/PLT
D	FCMST 10-50# GALV	10" GALVANIZED	50 LBS/CTN	48 CTNS/PLT

Landscape Staples • Boxed • 11 gauge

	PART #	SIZE	AMT PER CTN	QUANTITY
F	FCMST D100	6"	100/BOX*	12 BOX/CTN

Landscape Staples • Bagged • 11 gauge

	PART #	SIZE	AMT PER CTN	QUANTITY
F	FCMST 620240	6"	20/BAG*	12 BAGS/CTN
F	FCMST 650500	6"	50/BAG*	10 BAGS/CTN

Landscape Staples • Bulk Cartons • 11 gauge

	PART #	SIZE	AMT PER CTN	QUANTITY
E	FCMST 8500	8"	500/CTN*	50 CTNS/PLT
F	FCMST 61000	6"	1000/CTN*	60 CTNS/PLT
G	FCMST 41000	4"	1000/CTN*	60 CTNS/PLT

Irrigation Staples

	PART #	SIZE	AMT PER CTN	QUANTITY
H	FCMST 6251000-I	6"	25/BAG*	40 BAGS/CTN
H	FCMST 61000-I	6"	1000/CTN*	60 CTNS/PLT

Round Top Pins

	PART #	SIZE	AMT PER CTN	QUANTITY
I	FCMST 6-RT1000	6"	1000/CTN*	75 CTNS/PLT

*Counts vary by weight

FIGURE C – PROFILE VIEW

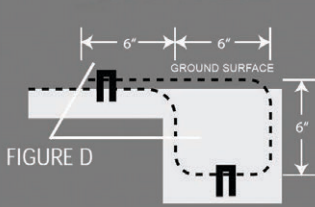


FIGURE D – PLAN VIEW




FIGURE E – PLAN VIEW




FIGURE F – CROSS SECTION VIEW





FIGURE G – PROFILE VIEW



PIN POUNDER & STAPLE SETTER



PIN POUNDER

STAPLE SETTER

Features

- ▶ Magnetic ends keep the pin/staples in place

Application

- ▶ **Pin Pounder:** for round top pins
- ▶ **Staple Setter:** use with 11 gauge, 1" steel staples of any length



Pin Pounder

PART #	LENGTH	QUANTITY
FCMST 6-RT POUND	39"	1/BOX

Staple Setter

PART #	LENGTH	QUANTITY
FCMST STAPLE SETTER	42"	1/BOX

STRINGALONG™



Features

- ▶ Makes raising & lowering elevations easy
- ▶ Easily visible from a distance, unlike pencil marks
- ▶ Take down the line & put it back up without measuring
- ▶ Ability to create three to four different lines from different directions at one time
- ▶ Built to last from nylon with a brass insert & zinc coated thumbscrew
- ▶ Fits round stakes up to 1"

Application

- ▶ Hardscaping
- ▶ Fencing
- ▶ Concrete & Masonry
- ▶ Surveying

StringAlong™ Collars

PART #	DESCRIPTION	QUANTITY
FCSTR COLLAR 10 PK	10 PACK	10 COLLARS

PART #	DESCRIPTION	QUANTITY
FCSTR COLLAR REFILL	REFILL	50 COLLARS

StringAlong™ Display

PART #	DESCRIPTION	QUANTITY
FCSTR COLLAR DISP	DISPLAY	50 COLLARS

Combo Pack with StringAlongs™

PART #	DESCRIPTION	QUANTITY
FCSTR COMBO	COMBO PACK COLLARS & STAKES	10 COLLARS 10 STAKES

STRINGALONG™ STAKES



Features

- ▶ 24" tall, 3/4" round steel
- ▶ Holes for quick nailing
- ▶ Pointed Tip
- ▶ Reusable

Application

- ▶ Concrete & Masonry
- ▶ Use with SRW's StringAlong
- ▶ Plant Support
- ▶ Setting line levels
- ▶ Surveying

StringAlong™ Stakes

PART #	DESCRIPTION	QUANTITY
FCSTR STAKE 10 PK	3/4"x24" FORMING STAKE	10 STAKES

CAULKING GUNS



Features

Premium Caulking Gun:

- ▶ 18:1 Thrust Ratio
- ▶ Professional Grade
- ▶ Spout Cutter/Seal Puncture Tool
- ▶ Revolving Barrel/ Zinc Handle

Standard Caulking Gun:

- ▶ 10:1 Thrust Ratio
- ▶ Ladder Hook & Thumb Release
- ▶ Smooth Rod Cradle
- ▶ Heavy Duty Steel Construction

Economy Caulking Gun:

- ▶ 3:1 Thrust Ratio
- ▶ Non-Drip for Easy Cleanup
- ▶ Smooth Rod Cradle
- ▶ Heavy Duty Steel Construction

Premium Caulking Gun

PART #	MODEL #	SIZE	AMT PER CTN
CG00002	250	10 OZ	6/CTN

PART #	MODEL #	SIZE	AMT PER CTN
CG00004	255	28 OZ	6/CTN

Standard Caulking Gun

PART #	MODEL #	SIZE	AMT PER CTN
CG00005	101	10 OZ	12/CTN

PART #	MODEL #	SIZE	AMT PER CTN
CG00006	105	28 OZ	6/CTN

Economy Caulking Gun

PART #	MODEL #	SIZE	AMT PER CTN
CG00001	012	10 OZ	24/CTN

PART #	MODEL #	SIZE	AMT PER CTN
CG00003	035	28 OZ	6/CTN

6 MIL. POLY SHEETING



Features

- ▶ Weed control
- ▶ Zero permittivity
- ▶ Easy to cut, easy to use
- ▶ Tear resistant

Application

- ▶ Runoff mitigation
- ▶ Moisture retention for concrete curing
- ▶ Project protection from rain

6 Mil. Poly Sheeting*

PART #	SIZE #	AMT PER CTN	QUANTITY
FBPF6 06100	6' X100'	1	100 CTNS/PLT
FBPF6 10100	10' X100'	1	48 CTNS/PLT

PART #	SIZE	AMT PER CTN	QUANTITY
FBPF6 20100	20' X100'	1	25 CTNS/PLT

*Contact Customer Service at 800-752-9326 for other available sizes

STRETCH WRAP



Features

- ▶ SRW offers a range of stretchable, highly elastic plastic film that keeps items tightly bound.

Stretch Wrap

PART #	SIZE	GAUGE	QUANTITY
SW 1751500 65 GA	17.5" X1500'	65	4/CTN
SW 181500 70 GA	18" X1500'	70	4/CTN

PART #	SIZE	GAUGE	QUANTITY
SW 181000 120 GA	18" X1000'	120	4/CTN

CRETE-RAIL™



Features

- ▶ One 50 lb. bag covers 13 - 17 linear feet.
- ▶ Variation will depend on application & type of subsurface material used
- ▶ Fiber reinforced for maximum strength
- ▶ Fast set time
- ▶ Rigid yet flexible support
- ▶ Polymer-modified for flexibility

Application

- ▶ Pavers & Permeable Pavers
- ▶ Natural Stone & Wetcast
- ▶ Driveways, Paths & Patios
- ▶ Open Graded Base

Crete-Rail™

PART #	SIZE	QUANTITY
CRAIL 50	50 LB BAG	49 BAGS/PLT

UNIVERSAL PAVER RAIL™

Features

- ▶ Permanent & invisible barrier between hardscapes & other landscape materials
- ▶ **Product height 1-7/8"**
- ▶ Best all-around product

Application

- ▶ Straight & curved applications
- ▶ For use with spikes, staples or stakes



Universal Paver Rail™ • Height 1 7/8"

PART #	SIZE #	AMT PER CTN	QUANTITY
PRAIL UNIV	7' 8"	12/BNDL	48 BNDLS/PLT

15' Universal Paver Rail available by special order—pallet qty only.

LOW PROFILE PAVER RAIL™

Features

- ▶ Can be installed against wetcast or natural stone to prevent shifting
- ▶ **Product height 1-3/16"**
- ▶ Ideal for natural stone

Application

- ▶ Low profile applications
- ▶ For use with spikes, staples or stakes



Low Profile Paver Rail™ • Height 1 3/16"

PART #	SIZE #	AMT PER CTN	QUANTITY
PRAIL UNIVLP	7' 8"	12/BNDL	48 BNDLS/PLT

FLEX PAVER RAIL™

Features

- ▶ Can be applied on both straight & curved applications
- ▶ **Product height 1-7/8"**
- ▶ Most flexible option

Application

- ▶ Straight & curved applications
- ▶ For use with spikes or staples



Flex Paver Rail™ • Height 1 7/8"

PART #	SIZE #	AMT PER CTN	QUANTITY
PRAIL EX	7' 8"	12/BNDL	48 BNDLS/PLT

RESOURCE & REFERENCE

We have created excellent resources in marketing & educational materials as well as high quality displays to showcase SRW Products. All making it easy & stylish in selling our products. To find these resources & so much more, visit the Dealer Resources tab on SRWProducts.com or contact your local Territory Sales Representative.

RETAIL DISPLAYS

- We make selling our products simple by providing a variety of marketing materials & retail displays. These high quality displays will showcase SRW Products with style and ease.



Narrow Sealer Display		
PART #	DIMENSIONS	WEIGHT
MSIDE	72" H X 28" W X 24" D	73 LBS



Fabric Display		
PART #	DIMENSIONS	WEIGHT
MMETAL RACK	72" H X 28 1/4" W X 27" D	45 LBS



Adhesive Display		
PART #	DIMENSIONS	WEIGHT
ADISPLAY	67" H X 16" W X 16" D	40 LBS

ONLINE RESOURCE



- Our online resources are available 24/7 to help you get your project done right. With how-to videos & installation instructions, you'll have everything you need to make your next job efficient and successful.

POINT-OF-PURCHASE MATERIALS



- In the hardscape industry, product information & instructions are vitally important. SRW Products offers a variety of printed materials to help you communicate with customers. Increase sales by keeping your retail displays stocked with print material & product samples.
- Materials available: Catalogs, Flyers, Brochures, Product Samples, Signage & More!

Contact your local Territory Sales Representative today to order

SRWA [®] PRODUCTS		RETAINING WALLS	PAVERS/CONCRETE	POOL COPINGS	NATURAL STONE & VENEERS	MANUFACTURED STONE	BRICK	OUTDOOR KITCHEN	MASONRY	METALS	WOOD	FOAMBOARD	MOST PLASTICS	GLASS & MIRROR	CERAMIC TILE	FIRE PITS
----------------------------	--	-----------------	-----------------	--------------	-------------------------	--------------------	-------	-----------------	---------	--------	------	-----------	---------------	----------------	--------------	-----------

SURFACE APPLICATION

ADHESIVE	VERTICAL INSTANT LOCK*	■	■		■	■	■	■	■	■	■	■		■	■	
	SUPERIOR STRENGTH SOLVENT	■	■	■	■	■		■	■	■	■					■
	RAPID-SET POLYURETHANE	■	■	■	■	■	■	■	■	■	■	■	■			■
	SF-8 ADHESIVE	■	■		■		■	■	■	■	■		■	■	■	

*Always make sure at least one surface is porous. Always test in a small area. Check product label for interior/exterior use.

SRWA [®] PRODUCTS		CONCRETE PAVERS	CLAY PAVERS	CONCRETE PERMEABLE PAVERS	WETCAST	GRANITE/QUARTZ	MARBLE/TRAVERTINE	LIMESTONE	BLUESTONE/SANDSTONE	BLOCK RETAINING WALLS	MANUFACTURED STONE	STAMPED CONCRETE	SEALER/CLEANER CATEGORY
----------------------------	--	-----------------	-------------	---------------------------	---------	----------------	-------------------	-----------	---------------------	-----------------------	--------------------	------------------	-------------------------

SURFACE APPLICATION

PS PENETRATING	■	■	■										PAVER SEAL
LG LOW GLOSS	■												
HG HIGH GLOSS	■												

PSX PENETRATING X-TREME	■	■	■	■						■	■		PREMIUM SEAL
LGX LOW GLOSS X-TREME	■			■	■	■	■				■	■	
HGX HIGH GLOSS X-TREME	■			■	■	■	■				■	■	
DG DUAL GUARD	■			■	■	■	■			■	■	■	

PRX PAVER RESTORE X-TREME	■				■	■	■						SPECIALTY SEAL
SGX STAIN GUARD X-TREME	■	■		■						■			
JS JOINT STABILIZER	■	■		■									
CG COUNTER GUARD				■	■	■	■	■	■	■	■		
S-PS PENETRATING	■				■	■	■	■	■		■		
S-PSX PENETRATING XTREME	■				■	■	■	■	■		■		

PW PAVER WASH	■	■								■			GENERAL CLEAN
DW DUAL WASH				■	■	■	■	■					

EF EFFLORESCENCE	■	■								■			SPECIALTY CLEAN
M°C MOLD, MOSS & MILDEW	■	■	■	■	■	■	■	■	■	■	■	■	
CDX CLEANER DEGREASER X-TREME	■	■	■	■	■	■	■	■	■	■	■		
RE RUST ELIMINATOR	■	■				■			■	■			
OC ORGANIC STAIN CLEANER	■	■		■	■	■	■	■	■	■	■		
XY XYLENE SOLVENT	■			■	■	■	■	■		■	■	■	
SS SEALER STRIPPER	■	■		■	■	■	■	■	■	■			

Always test a small area. Check product label for interior/exterior use. Refer to surface material manufacturer's recommendations on whether or not to seal.



SURFACE APPLICATION

NATURAL STONE

CONCRETE PAVERS

CLAY PAVERS

WETCAST

MANUFACTURED STONE

BLOCK RETAINING WALLS

HIGH PSI CONCRETE (5000 OR HIGHER)

REBAR REINFORCED CONCRETE

WIRE MESH REINFORCED CONCRETE

GREEN CONCRETE (12 HRS OR LESS)

GREEN CONCRETE (20 HRS OR MORE)

CURED CONCRETE

ASPHALT

PORCELAIN

BLADES	GENERAL PURPOSE	■	■	■	■	■	■			■		■	■		
	ALL PURPOSE	■	■	■	■	■	■			■	■		■	■	■
	ABRASIVE MATERIAL											■			■
	HARD MATERIAL	■	■	■	■			■	■	■				■	■

GEOGRID: CROSS REFERENCE CHART

SRW		STRATA		SYNTEEN		MIRAFI		TENSAR		CARTHAGE		VERSA-LOK		GEOSTAR	
Series	LTDS	Stratagrid®	LTDS	SF	LTDS	Miragrid®	LTDS	MSE/HS	LTDS	GX®	LTDS	VersaGrid	LTDS	GeoGrid	LTDS
Universal	688	—	—	—	—	—	—	—	—	—	—	—	—	MG100	963
3 Series	1161	SG150	939	SF20	1161	2XT	1202	UX 1100	1450	SF20	1161	—	—	HP100	1155
5 Series	2064	SG200	1919	SF35	2064	3XT	2104	UX 1400	1760	SF35	2064	VG3	2064	HP200	2057
7 Series	2867	SG350	2666	SF55	2867	5XT	2826	UX1500	2860	SF55	2867	VG5	2867	HP300	2862
8 Series	3555	SG500	3412	SF65	3555	7XT	3547	UX1600	3620	SF65	3555	—	—	—	—
9 Series	4329	SG550	4346	SF80	4329	8XT	4449	UX1700	4390	SF80	4329	VG8	4329	HP500	4404
10 Series	5160	SG650	5332	SF90	5160	—	—	UX1800	5080	SF90	5160	—	—	—	—
11 Series	5906	SG700	6292	SF110	5906	10XT	5712	—	—	SF110	5906	—	—	HP700	5929

SRW Roadbase Geogrids are also available. Call for quote and individual specs.

GEOGRID SPECIFICATIONS

PROPERTIES	Units	3 Series	5 Series	7 Series	8 Series	9 Series	10 Series	11 Series
Long Term Design Strength	lb/ft, MD	1161	2064	2867	3555	4329	5160	5906
Aperture Size (avg)	MD x CMD	.79" x 1"	.79" x 1"	.79" x 1"	.79" x 1"	.79" x 1"	.63" x 1"	.63" x 1"
Design Strength Properties	RFCR/RFID/RFD	1.51/1.05/1.10	1.51/1.05/1.10	1.51/1.05/1.10	1.51/1.05/1.10	1.51/1.05/1.10	1.51/1.1/1.05	1.51/1.05/1.1
Wide Width Tensile Strength	% Ultimate, MD	2025	3600	5000	6200	7550	9000	10300
Roll Widths	ft	4, 6, 12	6, 12	6, 12	6, 12	6, 12	6, 12	6, 12
Comparative Products	—	Mirafi 2XT Strata SG150	Mirafi 3XT Strata SG200	Mirafi 5XT Strata SG350	Mirafi 7XT	Mirafi 8XT Strata SG550	—	—

Specifications current at the time of printing. Call SRW Products 800-752-9326 for inquiries.

ROAD BASE GRID SPECIFICATIONS

PROPERTIES	Units	Type 1	Type 2
Ultimate Strength	MD XMD	850 1300	1310 1970
Tensil at 2% Strain	MD XMD	580 920	810 1340
Load at 5% Strain	MD XMD	280 450	410 620
Aperture Size (avg)	MD XMD	1.06" 1.45"	1.10" 1.49"
Min. Rib Thickness	MD x CMD	.03" .03"	.05" .05"
Roll Widths	ft	13.1'	13.1'
Comparative Products	—	Mirafi BXG110	Mirafi BXG120



TECHNICAL PRODUCT INFORMATION

One of the benefits of partnering with SRW Products is our dedication to customer service & support. We also provide our product technical data sheets & safety data sheets on our website.



Our Product Manager team is also available to help answer technical questions you might have. Call us, or contact us through our website.



GEOTEXTILE SPECIFICATIONS			NON-WOVEN FABRICS				WOVEN FABRICS	
PROPERTIES	TEST	UNITS	NW4	NW4.5	NW6	EC8	SS5	SS6
Weight (typical)	D5261	oz/sq yd	4	4.5	6	8	4	6
Grab Tensile Strength	D4632	lbs	100	120	160	205	200	315
Grab Elongation	D4632	%	50	50	50	50	15	15
Trap-Tear Strength	D4533	lbs	45	50	60	80	75	120
CBR Puncture	D6241	lbs	300	340	410	535	700	900
Water Flow Rate	D4491	gpm/ft ²	140	135	110	95	5	4
Permittivity	D4491	1/sec	2	1.7	1.5	1.4	.05	.05
UV Resistance (500 hr)	D4355	%	70	70	70	70	70	70
Apparent Opening Size	D4751	US Sieve	70	70	70	80	40	40

Specifications current at the time of printing. Call SRW Products 800-752-9326 for inquiries.

LANDSCAPE FABRIC CROSS REFERENCE CHART

SRW	DEWITT	FABRISCAPE	HANES	Ground Cover Industries
Residential (6 yr)	6 yr Weed Barrier	—	—	180 Series
Contractor (10 yr)	—	—	Weed Barrier (Pro Ion)	—
Professional (15 yr)	12 yr Weed Barrier	—	Weed Barrier (Pro Ion Plus)	395 Series
SB2 (10 yr)	Tyvar Premium/Contractor's Select	Commercial Weed Stopper	Pro Steel	—
SB3 (20 yr)	Tyvar Professional/Contractor's Select Plus	Professional Spunbond	Pro Steel Plus	295 Series
GC3	—	Woven Ground Cover	Ground Cover (Pro Gold)	—
GC PRO	Sunbelt	—	—	320 Series
LS3	Filter Fabric	Professional Non-Woven	Filter Fabric	—
Pro Plus IV	Professional Max Weed Control	Woven Weed Restrictor	Pro Platinum	400 Series
Pro Plus V	Pro 5	Woven Weed Restrictor Plus	Pro Platinum Plus	500 Series

These cross-reference tables are for comparison only. This information has been obtained from the manufacturers' literature or website. It is the users' responsibility to verify that this is the most current information. All final geogrid/construction comparisons should be determined by a licensed design engineer.

CONSTRUCTION FABRIC CROSS REFERENCE CHART

SRW	MIRAFI	WILLACOOCHIE	US FABRICS	CARTHAGE	SKAPS
NW4	140NC	400N	US 115NW	FX 40HS	GT 140
NW4.5	140N	450N	US 120NW	FX 45HS	GT 142
NW6	160N	600N	US 160NW	FX 60HS	GT 160
NW7	170N	700N	US 180NW	FX 70HS	GT 170
EC8	180N	800N	US 205NW	FX 80HS	GT 180
NW10	1100N	1000N	US 270NW	FX 100HS	GT 110
NW12	1120N	1200N	US 300NW	FX 120HS	GT 112
NW16	1160N	1600N	US 380NW	FX 160HS	GT 116
SS5	500X	200W	US 200	FX 55	SW 200
SS6	600X	315W	US 315	FX 66	SW 315



HIGH PERFORMANCE FABRIC CROSS REFERENCE CHART

SRW	MIRAFI	WILLACOOCHIE	US FABRICS	CARTHAGE	SKAPS
SRW 270HP	HP270	WINFAB 270HP	US 2500	FX-270MF	M220
SRW 370HP	HP370	WINFAB 370HP	US 3600	FX-370MF	M330
SRW 4x4	HP565	WINFAB 4x4	US 4800	FX-370MF	M440
SRW 570HP	HP570	WINFAB 570HP	US 4800	FX-370MF	—
SRW 770HP	HP770	WINFAB 770HP	US 7200	—	—
SRW MM300	FW300	WINFAB 2300	US 830	Carthage 12% HD	—
SRW MM402	FW402	WINFAB 2197	US 1540	Carthage 15%	M404
SRW MM403	FW403	WINFAB 2403	US 840	Carthage 10% HD	—
SRW MM404	FW404	WINFAB 2404	US 230	Carthage 4% HD	—
SRW MM700	FW700	WINFAB 2199	US670	Carthage 6%	M706
Permeable 350	—	—	—	—	—

Stay CONNECTED!



@ SRWproducts

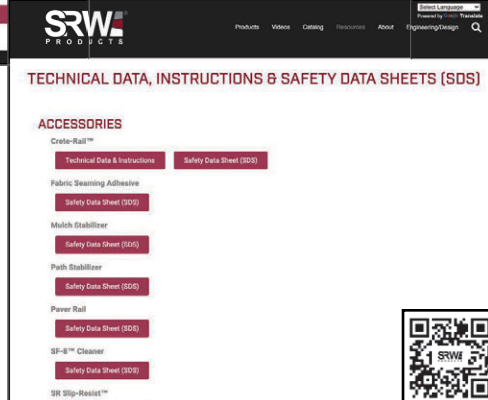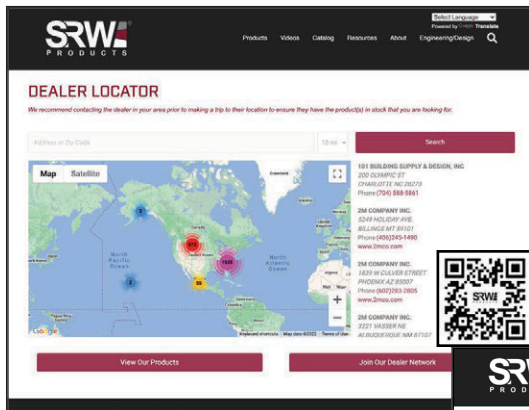



Contact us: 800-752-9326

View our digital catalog at SRWProducts.com